

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 May 2001 (25.05.2001)

PCT

(10) International Publication Number
WO 01/37589 A1

(51) International Patent Classification⁷: H04Q 7/20

(21) International Application Number: PCT/US00/31718

(22) International Filing Date:
20 November 2000 (20.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/166,585 19 November 1999 (19.11.1999) US
60/232,340 14 September 2000 (14.09.2000) US
09/714,841 16 November 2000 (16.11.2000) US

[US/US]; Suite 315N, 7777 Leesburg Pike, Falls Church, VA 20043 (US). GADBOYS, Jeffrey, A. [US/US]; 3715 Ceylon Drive, Gulf Breeze, FL 32561 (US). JACOBS, Jack, H. [US/US]; 101 Oaks Road, Millington, NJ 07946 (US).

(74) Agent: OLIVER, Milton; Ware, Fressola, Van Der Sluys & Adolphson LLP, P.O. Box 224, 755 Main Street, Monroe, CT 06468-0224 (US).

(81) Designated States (*national*): AU, BR, CA, JP, MX, US.

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(71) Applicant (*for all designated States except US*): TRI-GUARD GROUP LLC [US/US]; 26 Longmeadow Drive, Westwood, MA 02090 (US).

Published:

— With international search report.


— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): LAYTON, Pamela, G. [US/US]; 26 Longmeadow Drive, Westwood, MA 02090 (US). CRAWFORD, Keith, D. [US/US]; 67 Tanglewood Road, Newton, MA 02459 (US). SKJEL, Sidney

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMBINATION WIRELESS ALARM SYSTEM AND TELEPHONE CONNECTED TO AN INFORMATION MANAGEMENT NETWORK FOR AUTOMATED DELIVERY OF ALARM NOTIFICATIONS AND OTHER INFORMATION

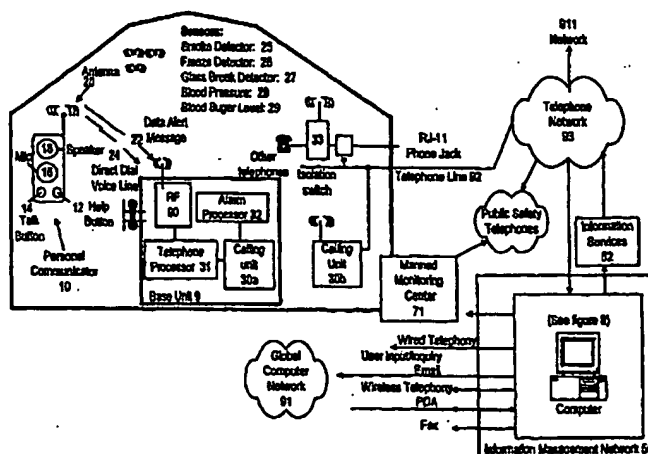

(57) Abstract: A system includes a corded or cordless telephone and answering machine (81) combined with a wireless security system (10) suitable for monitoring premises, such as a home, apartment or business, and the health of its occupant(s). Various types of wireless sensors (25-29) (such as motion and smoke detectors and medical monitors) communicate with the base unit (9), which automatically calls a proprietary Information Management Network (IMN, 50). The IMN instantaneously finds, in its database, the appropriate customer profile and causes alert messages, optionally including customer-specific information from the database (78), to be automatically sent, simultaneously or sequentially, to contact persons predesignated by the customer via the customer's chosen media such as telephone, fax pager, e-mail and/or manned monitoring center (71).

WO 01/37589 A1

COMBINATION WIRELESS ALARM SYSTEM AND TELEPHONE CONNECTED TO AN
INFORMATION MANAGEMENT NETWORK FOR AUTOMATED DELIVERY OF ALARM
NOTIFICATIONS AND OTHER INFORMATION

Inventors: Pamela Layton, Keith Crawford, Sidney Skjei,
Jeffrey Gadboys & Jack Jacobs

The disclosures of U.S. provisional applications,
S.N. 60/ 166,585, filed 19 NOV. 1999, and U.S.S.N. 60/232,340,
filed 14 SEP. 2000, are hereby incorporated by reference.

FIELD OF THE INVENTION

The present invention relates generally to a combination system of a corded or cordless telephone; a monitoring alarm system for homes, apartments and business premises; a compact transportable wireless personal communicator for one-touch communication; a concealable dialing unit connecting to the public switched telephone network (PSTN) or in some versions, a wireless commercial network; and any of a plurality of peripheral wireless devices, such as security sensors, environmental sensors, medical monitoring sensors and home automation control modules; all interfaced with an interactive information management network ("IMN") routing system for alert, medical and other information to one or more remote points of contact. Capabilities of the system include externally directed control of alarm system operation and home automation devices via the information management network or remote telephone.

E:\WP51\MO\APPL\8733-104.WP 16NOV2000

BACKGROUND OF THE INVENTION

Due to their complexity and the hardwired nature of sensors and/or the alarm control panel central to the operation of current systems, common home security monitoring systems require costly professional installation. The hardwired characteristics of the control panel prevent self-installation and/or relocation of the system should the owner change residences. Monitoring services are available through a limited number of specialized manned monitoring centers. Due to high equipment and personnel costs in these centers, monitoring fees are generally priced out of the economic reach of most consumers. Consequently, only 15% of the households in the United States have monitored security systems. Even fewer households have means to remotely monitor, e.g. from work, the medical condition of an ailing relative.

In the event of a system alert, current monitoring center procedures provide the customer with an alarm verification call, notification to local police or fire authorities and notification to a number of designated contact numbers. Current systems allow customers limited opportunities to alter contact numbers or to be contacted via the growing variety of communication devices available to the public (e.g., fax, e-mail, pager, and/or Personal Digital Assistant--PDA).

It would be a desirable improvement if there could be an automated secure monitoring network, which could efficiently and inexpensively notify designated points of contact via the wide variety of communications media. It would be a further improvement if users had direct, secure access to the monitoring network database via phone or the global computer network in order to review and change alarm system configuration, points of contact and emergency information any time they desired. It would be a further improvement if the use of the alarm system could be electronically logged in the base unit and in the Information Management Network so that it could be reviewed later.

The prior art alarm systems generally comprise a control

panel and several wired or wireless remote sensors. The control panel houses the control circuitry and interface circuits, such as telephone jacks and cellular or radio transceivers.

Prior art cordless telephones generally comprise a base unit and a cordless handset. The base unit is connected to the public switched telephone network via telephone jacks. The base unit and handset communicate by radio frequency, typically at 900 MHz (megaHertz) or 2.4 Ghz (gigaHertz). Prior art corded telephones generally comprise a base unit and a corded handset.

It would be a desirable improvement if there could be a combined unit of (1) the corded or cordless telephone base unit and (2) the control panel of a monitoring alarm system. There is significant redundancy between the circuitry of a corded or cordless telephone base unit and an alarm system control panel. The present invention combines the circuitry of both devices, resulting in an economic utility without compromising the integrity of either system. The combined capabilities of the telephone and alarm circuits provide a single device which can monitor a wide variety of security and environmental sensors, perform standard telephone functions and, when required, can automatically pass sensor alert messages via wired or wireless network communication channels to a fully automated monitoring and Information Management Network.

It would be a further improvement if this Information Management Network, having automatically received an alert call from the premises where the phone is located, would automatically access a data base, find the particular owner's profile, and then also automatically send alert messages to phones, faxes, email devices, pagers, hand-held computers and/or a manned monitoring center as previously specified by the owner. We are aware of no telephone-based security system that is combined with an Information Management Network that allows for the collection and routing of security, medical and other information to devices of an owner's choosing. The unique interface between the telephone

and alarm circuitry also allows the flow of command signals back to the alarm circuitry for remote control of alarm system operation and home automation control and wireless reporting devices. It would be a further desirable improvement if this system could be connected to a separate Calling Unit using radio frequencies, so that any attempt to remove power or functionality from the system would result in an automatic alert call.

The combination of telephone and alarm circuitry supports two-way communication capabilities between a Personal Communicator Device (PCD) and the telephone. The PCD offers the user a small, portable, wireless personal assistance communication device capable of one-button alerting of designated contact numbers and/or local police/fire authorities in the event of an emergency. The device also offers two-way voice communication with the contact party via the telephone base unit while also notifying the information management network that an alert call has been placed. The information management network allows notification of an emergency condition to be forwarded to designated points of contact of the owner's choosing (e.g., friends, neighbors or relatives). We are aware of no currently available personal assistance device which enables a person to direct-dial an emergency response number (e.g. 911 in North America) for help and also to automatically notify a friend or relative of the call.

It would be a desirable improvement if children, baby sitters, those who are medically challenged, the elderly and others could have the capability of direct dialing to a designated contact point from a small device with two-way communication. Moreover, it would be a desirable improvement if the routing of those calls could be easily modified on the telephone base unit or through the Information Management Network. It would also be desirable for the user to designate the routing of his emergency or security calls either sequentially or simultaneously. It would be a desirable improvement if there

were a telephone base unit connected to an Information Management Network that is capable of receiving transmissions of real-time medical information that is then automatically supplemented with patient information and routed automatically to one or more points of contact, such as hospitals, doctors' offices and/or relatives, simultaneously or sequentially.

A signal transmitted by the personal communicator device (PCD) may include an emergency code. For example, in the event of an emergency, such as a heart attack, a customer may press a "panic button" found on the PCD. Pressing the panic button may cause the base unit to transmit an emergency call to the network where information (text or voice) is routed to the pre-designated contact points either by public switched telephone network (PSTN), wireless communication network, or the global computer network. If the customer has subscribed to manned-monitoring station notification, the station operator will be able to speak directly to the customer via the PCD, which contains a speaker and microphone, in order to determine customer assistance requirements. In some embodiments, where separate panic buttons are available for identifying medical, police, fire or other types of emergencies, the nature of the emergency is automatically communicated to the designated responder. In other embodiments, the PCD notification to the Information Management Network initiates forwarding of additional information such as medical data, the customer's exact location in the home, or an access code allowing entrance into the residence as a supplement to the transmitted message.

Managed healthcare protocols have resulted in increasingly earlier release from hospitalization, or in many cases, no hospitalization at all. In-home health monitoring equipment, such as cardiac, blood oxygen level, fetal and blood pressure monitors, have become an integral part of acceptable medical care. The development of affordable home monitoring systems capable of communicating real-time medical status information to

a phys , hospital or other concerned party is of significant
 benefi the public. We are aware of no commercially available
 wireli wireless device that monitors medical sensor status
 and wh cessary, automatically notifies an Information
 Manage Network, which then forwards specific real-time
 medica ormation to designated medical contact points, as well
 as not g friends or family of an abnormal condition.

Furthe are aware of no commercially available device that
 accomp s the transfer of this information from medical
 device ked to the system by a Radio Frequency (RF) interface
 in a portable form. It would also be desirable for the
 Inform Management Network to be programmed to make periodic
 automa calls into the home to determine occupant activity
 and/or status of the medical equipment in the home.

I. Automation devices are becoming an increasingly popular
 means improving quality of life. To our knowledge, home
 automa systems do not offer a user the ability to control
 envirc al or appliance devices from outside the premises
 using ublic switched telephone network (PSTN), wireless or
 global ounter network connections to a telephone base unit.

I ould be a desirable improvement if there were a
 combir on alarm/telephone Base Unit, connected to an
 Inform on Management Network via PSTN or the wireless
 infras cture, that would enable one to control home automation
 device ad a home security system, easily and inexpensively,
 using telephone or global computer network from a remote
 locati

SUMMAR

THE INVENTION

2. The invention comprises a telephone base unit (Base Unit)
 that c es the circuitry and components of a corded or
 cordle elephone and the components of an alarm system control
 panel, able of alarm and home automation functionality. In
 anothe nfiguration, the invention also includes an independent
 cordle ersonal communication device. The telephone Base Unit

a phys
benefi
wireli
and wh
Manage
medica
as not
Furthe
accomp
device
in a
Inform
automa
and/or

, hospital or other concerned party is of significant
the public. We are aware of no commercially available
wireless device that monitors medical sensor status
cessary, automatically notifies an Information
Network, which then forwards specific real-time
ormation to designated medical contact points, as well
g friends or family of an abnormal condition.

are aware of no commercially available device that
s the transfer of this information from medical
ked to the system by a Radio Frequency (RF) interface
portable form. It would also be desirable for the
Management Network to be programmed to make periodic
alls into the home to determine occupant activity
status of the medical equipment in the home.

Automation devices are becoming an increasingly popular
improving quality of life. To our knowledge, home
systems do not offer a user the ability to control
al or appliance devices from outside the premises
public switched telephone network (PSTN), wireless or
puter network connections to a telephone base unit.

ould be a desirable improvement if there were a
an alarm/telephone Base Unit, connected to an
on Management Network via PSTN or the wireless
ecure, that would enable one to control home automation
ad a home security system, easily and inexpensively,
telephone or global computer network from a remote
locati

SUMMAR

THE INVENTION

7
that c
cordle
panel,
anothe
cordle

vention comprises a telephone base unit (Base Unit)
aes the circuitry and components of a corded or
elephone and the components of an alarm system control
able of alarm and home automation functionality. In
onfiguration, the invention also includes an independent
ersonal communication device. The telephone Base Unit

includes data, radio and/or telecommunications interfaces for establishing voice, data, radio and other telecommunications links with, among other devices, remote alarm sensors, a Calling Unit, Telephone Isolation Switches, home automation control modules, a wireless personal communicator device (PCD), a cordless handset, a public switched telephone network, and in some instances, connectivity with the wireless/cellular infrastructure, Integrated Services Digital Network (ISDN), Digital Subscriber Line (DSL) or coaxial or fiber-optic cable for interface to the global computer network. In other embodiments, the Base Unit combines the preceding components with a separate, redundant calling unit for added security. The telephone system allows the user to dial into the alarm unit and turn it on or off, change its configurations and get system status reports. In other embodiments, the telephone base unit will communicate with wireless, independent medical devices for in-home medical monitoring. For example, one could check on an elderly relative.

Using the public switched telephone network (PSTN), the wireless infrastructure, Integrated Services Digital Network (ISDN), Digital Subscriber Line (DSL) cable modem or other interface to the global computer network, the base unit or independent calling unit (CU) communicates with an information management retrieval and transmission network, hereinafter referred to as the "Information Management Network" (IMN), using a series of Dual Tone Multiple Frequency [DTMF] tones that interface with the IMN to initiate a series of information delivery transactions. The IMN simplifies routing of alarm notifications by providing a single universal access point, giving users quick access to predetermined connections. The IMN is the combination of a DTMF modem, an application interface (API), a series of servers containing customer information databases, a unified messaging platform, an event log, a web interface, and a Private Branch Exchange/Interactive Voice Response (PBX/IVR) interface (See FIG. 8). This configuration

translates the DTMF tones received from the base unit into a message capable of being sent in voice or text format to any number of customer designated devices including telephone, fax, email addresses, pager, or Personal Digital Assistant (PDA) such as a PALM PILOT®. The IMN can be securely accessed via the global computer network or standard telephone transmission lines to program a user's customer profile, to include notification preference points, times for notification and other related information. Receipt of information by the user can be confirmed and a record kept in the event log database of the IMN and in the Base Unit.

The base unit has the ability to make a call to a dial-in node of the IMN, upon command from the Alarm Processor, nominally a microprocessor, microcontroller or application specific integrated circuit (ASIC). The alarm processor receives the input commands, whether initiated from the communicator, detected on-site by a smoke or burglar alarm or security or environmental sensor or automatically detected by a sensor or medical monitoring device, and then determines what action to command, makes the telephone connection and awaits confirmation of receipt. If the confirmation is not received back, the alarm processor keeps trying to connect and send the message or call. The user's identification number, phone number and sensor information (FIG. 12) are part of the message transmitted to the IMN. The IMN then retrieves user information and alert notification addresses (including but not limited to phone numbers, fax numbers email addresses, pager numbers, and Personal Digital Assistant device addresses) from the customer database and forwards the alarm notification or medical information to the designated points of contact, simultaneously or sequentially. For an alarm notification, the information conveyed includes the customer name, location of the base unit, phone number of base unit, date, time, type of sensor and zone. The user's profile residing in the IMN database can be modified at any time over the

telephone or global computer network. Confirmation that the alarm notification has been successfully transmitted to the customer's designated device(s) is housed in an event log in the IMN and in the base unit as well. In a preferred embodiment, the IMN allows for a two-way communication interface with the base unit. In this way, the present invention allows for remote activation or resetting of the alarm and other devices in the home for security and home automation purposes, through the initiation of a phone call or global computer network transmission to the IMN. In addition, the present invention includes the maintenance of an event log in the base unit, and another in the IMN, permitting retrieval of call data. The use of the IMN allows the user to preprogram alarm and home automation functions to initiate specific processes at specified times of the day. Similarly, the user can call the unit directly via telephone and initiate alarm and home automation transactions.

The base unit includes a status display, which indicates the operating and battery status of all portable wireless devices, security sensors and devices transmitting to the telephone. The Liquid Crystal Display (LCD) will provide visual alarm status while an audio alarm will alert the individual of a security or sensor infraction. In embodiments of the system which do not include the PCD, an alarm event triggers the microprocessor to generate an audible alarm and visual notification in text format on the LCD of the Base Unit, while calling the IMN. If an alert occurs while the telephone line is being used for a fax, conventional conversation, or any other purpose, the system automatically terminates the call, freeing the line, and initiates the dial out process to send the alert signal to the IMN. The Base Unit has control circuitry that is configured such that if, during a telephone call, the Base Unit receives an alarm signal, the Base Unit will either (1) if it is a one-line phone, disconnect the line and contact the IMN, or (2) if it is a 2-line phone, call the IMN on the second line. Since a house may have a

plurality of conventional phones connected to a single outgoing line, and it is necessary to be able to pre-empt all these extension phones, a small module with a wireless control signal receiver is preferably interposed between each extension phone and its respective wall jack. In this configuration, the base system wirelessly sends a cutoff signal to the module switch at each telephone jack, allowing the telephone line to be seized and cleared for alarm information transmission purposes. These modules are herein referred to as the "Telephone Isolation" (TI) switches.

In a telephone-based security system, there is always the possibility that an intruder will disable the alerting system by cutting the telephone line to the jack. To enhance security, in some embodiments, the system of the present invention may include a separate Calling Unit with its own dial-out capability, which communicates at regular intervals with the Base Unit. If, for example, the Calling Unit does not receive the expected message that it is still active from the primary Base Unit, due to unplugging of the Base Unit, the Calling Unit transmits a message to the IMN that the primary Base Unit is inoperative. The IMN can then undertake appropriate investigation and/or notification steps, according to its programming. This Calling Unit can also act as the interface to the Telephone Network for all alarm messages, eliminating the possibility of defeating the alarm by cutting the phone line at the Base Unit or destroying the Base Unit. In another embodiment, the Calling Unit communicates with the IMN via wireless network channels to protect against alarm interruption due to the severing of telephone lines external to the premises.

It is an object of the invention to make it easy for the average homeowner to install the above combination corded/cordless telephone Base Unit/premises-monitoring system/personal communication system. The Base Unit, when not being used for monitoring purposes, can also be used for

conventional telephone functions via the public switched local and long-distance networks, and in some configurations via the wireless networks or DSL infrastructure.

In summary, we are not aware of any other telephone-based security system that interfaces with an Information Management Network that enables an individual to modify contact instructions and notification numbers which are stored in the customer profile. We are also not aware of any telephone-based security system that is interfaced with an IMN to control a home security system and remote automation devices that could modify the home environment. We are also not aware of any other telephone-based system that is able to communicate with an information network using DTMF tones, which then cause the network to process and send specified information to a series of different communications media, storing these call data in an event log in the phone and network for later retrieval. We are also not aware of a telephone-based medical monitoring communication system that transmits real-time and current medical information to an Information Management Network, which then is capable of routing said information to multiple pre-designated points of contact. We are aware of no monitored home security/alarm system that is highly transportable and can be easily moved to a different residence by a homeowner, renter or small business owner.

The present invention addresses these shortcomings and combines all of the above components into a single comprehensive solution. Independent wireless units can be interfaced with the telephone Base Unit that allow for varied processes in connection with the same telephone. The user can select some or all of the available options, including condition sensors, security units, personal communicator transceivers, home automation and medical monitoring units. As other monitoring devices are purchased, the placing of a phone call or the input of information via the IMN website permits quick and efficient adding of the new peripheral devices to each owner's system.

BRIEF FIGURE DESCRIPTION:

FIG. 1 is a system diagram of the present invention, including wireless portable devices, telephone Base Unit, and Information Management Network;

FIG. 2 is a diagram showing the flow of signals and messages when a sensor alert is triggered;

FIG. 3 is a diagram of a reset, reconfiguration or inquiry via the telephone network;

FIGS. 4a & 4b are diagrams of the relationship between the Base Unit and the Calling Unit; FIG. 4a shows a first embodiment in which the Base Unit and the Calling Unit are in separate housings, while FIG. 4b shows a second embodiment in which the Base Unit and the Calling Unit are in a single common housing;

FIG. 5 shows the communication between the Base Unit and the Personal Communicator Device (PCD);

FIG. 6 is a diagram of the flow of the signals and messages when a Personal Communicator Device (PCD) is used to initiate a call for emergency assistance, for example to a "911" number;

FIG. 7 is a diagram showing how the Base Unit or calling Unit instructs a Telephone Isolation Switch to disconnect other telephone extensions and thereby make a telephone line available;

FIG. 8 is a diagram of the Information Management Network and the interface between the Base Unit and the IMN;

FIGS. 9A-9B show a preferred format of a customer profile;

FIG. 10 shows a preferred structure of the Base Unit; and

FIGS. 11-12 show a preferred structure of a DTMF signal from the Base Unit or Calling Unit to the network.

DETAILED DESCRIPTION:

FIG. 1 shows a typical, but not all-inclusive, embodiment of the system of the present invention. The system includes a base unit 9, sensors 25-29, a calling unit 30 located either within the base unit 30a or as a separate unit 30b, telephone isolation switches 33, a personal communicator device (PCD) 10, and an Information Management Network (IMN) 50. In this description,

PCD 10, sensors 25-29, and switches 33 are among the devices mentioned generically as "wireless peripheral devices" of the base unit 9. Base unit 9 may contain a telephone answering machine.

As shown in FIG. 10, the base unit 9 preferably includes a telephone processor 31, alarm processor 32, built-in siren (not shown), and multi-spectrum RF radio 90 including an RF amplifier. The telephone processor 31 is interfaced with the alarm processor 32 in such a way that it is possible to call into the base unit 9 from a remote location to turn it on, turn it off, reconfigure or reset it, or to obtain status and alarm event information. This base unit 9 contains control and interface electronics in the form of a microcontroller such as (but not limited to) the model PIC16C77 available from the Microchip company (Chandler, Arizona, USA). Base unit 9 may be either corded like a conventional telephone, or cordless. However, in either case, RF radio 90 permits base unit 9 to exchange voice communications on a first radio frequency (e.g. 900 MHz) with a first wireless peripheral device such as PCD 10, while simultaneously exchanging data communications on a second frequency (e.g. 300 MHz) with either PCD 10 or with a second peripheral device such as a sensor or a telephone isolation switch 33.

FIG. 8 shows the IMN 50, which simplifies routing of alarm notifications by providing a single universal entry or access point, giving users quick access to predetermined connections. This network translates Dual Tone Multiple Frequency (DTMF) tones (a preferred format of which is shown in FIG. 11) received from the base unit 9 or calling unit 30 into a message that is sent in voice or text format to any number of user designated devices including telephone, fax, e-mail addresses, pager, etc. The IMN 50 may be accessed over a global computer network 91 (commonly known as "the Internet"), or by a standard telephone 81, to program a user's customer profile which includes notification

preference points, times for notification and other related information, for each home resident, as shown in FIGS. 9A-9B.

Receipt of information by the user may be confirmed and a record kept in database event logs (not shown) of the IMN 50 and in the Base Unit 9. The IMN 50 also allows for a secure, passcode-based, 2-way interface with the base unit 9.

Suitable security protocols are well known in the art and are available from various commercial vendors such as VERISIGN, ENTRUST, and Baltimore Technologies. This enables the user to control home and security functions and system configurations from remote locations using one's telephone or the global computer network. The following are examples of such configurations:

Sample Configuration	Description
Disarmed	Smoke detectors and personal communicator are active
Periphery Armed	Door and Window Sensors are Armed
Intrusion Armed	Motion Sensors are armed
Door Notification	Door Chime is active when door is open
Home Appliances Timed	Home appliances such as lights are controlled by timer
Home Appliances Sensor Activated	Home appliances such as lights are activated by sensors, such as motion detector

The IMN 50 can also transmit to the user a variety of informational services 52 such as maintenance prompts, multimedia alerting of news or financial events, messages, and other information requested by the user.

TELEPHONE PROCESSOR 31

As shown in FIGS. 1, 4a, 4b, 5 and 10, the telephone processor 31 includes an integrated circuit or circuits which control all standard telephone functions such as speakerphone, corded or 900 MHz or 2.4 GHz cordless telephone interface, answering machine, line signaling, remote call in, caller ID, etc. The processing and switching device implementation of an existing corded or cordless answering telephone machine may be used, for example an MC68HC05 microcontroller (available from MOTOROLA, INC., Phoenix, Arizona USA), with the remainder of the

processing and electronics for alarm and calling unit functions residing on an interface board external to the telephone processor 31, all within the housing of the base unit 9.

ALARM PROCESSOR 32

An alarm processor 32 (AP), as shown in FIGS. 1, 4a, 4b, 5, and 10, located in the base unit 9 performs a variety of functions. A suitable commercially available chip is model PIC16C77 from Microchip (Chandler, Arizona, USA). Among other functions, the AP manages and terminates alarm and alarm system operation events (an alarm, a test, and inquiry); maintains and changes the base unit's operational status from active to standby; and logs significant event details, including low battery warning. The AP interfaces with the telephone processor 31 using a standard bus, such as an I2C bus, to obtain time, keypad information, and/or to receive incoming data signals from the telephone network and to pass data or Dual-Tone Multi-Frequency (DTMF) information, e.g. in the format shown in FIG. 11. The AP responds to digital signals by outputting audible speech signals for responding to telephone or user inquiries. The AP also interfaces with the sensors 25-29 to receive alarm information and interfaces with a remote keypad (not shown). The AP manages system setup and configuration changes including those received through the IMN 50 or the normal telephone network 93. The AP interfaces with the calling unit 30a or 30b and provides transmission to the IMN 50 of message data such as test status, telephone number to be called, unit identification, alarm zone and other information, including sensor type. The AP interfaces with several RF telephone isolation switches 33 and accomplishes line seizure and manages downline reprogramming (a system in which programs are loaded into the memory of a computer system via phone or global computer network 91). The AP maintains a log of retrievable (synthesized voice or LCD) event and configuration information (not shown). The AP manages

appliance and sensor control for automation control devices, a number of which are commercially available, from various vendors.

CALLING UNIT 30

As shown in FIGS. 4a-4b, the calling unit 30 of FIGS. 1 and 5 can be made in a first configuration 30a, within a single housing with the base unit 9 (FIG. 4b) or in a second configuration 30b, located remotely from the base unit 9, in a separate housing (FIG. 4a). The primary rationale for a remote calling unit 30b is the ability to place the calling unit in a hidden location, to prevent intended or unintended disabling of the system by an intruder. This is accomplished by the unique design feature that, whenever a sensor emits an alert, the alarm processor 32 immediately generates an alarm message and sends this alarm message by wireless transmission to the remote calling unit 30b, which stores it in memory. If the remote calling unit 30b does not receive an alarm cancellation message from the alarm processor 32 within a brief specified period of time, the alarm information is transmitted to the IMN 50 via the telephone network 93. Conversely, if the alarm is cancelled by entering the correct "disarm" code on a keypad at the base unit 9 within the specified period of time, the base unit 9 sends an alarm cancellation message to the remote calling unit 30b and the alarm is cancelled, prior to transmittal to the IMN 50.

As shown in FIGS. 2 & 7, in the case of an actual alarm, the remote calling unit 30b receives the alarm message from the alarm processor 32, briefly waits for possible cancellation, then seizes the telephone line by use of the telephone isolation switches 33 (FIG. 7, right). The remote calling unit 30b then dials and delivers the message using DTMF coding to the IMN 50 and stands by, to receive a confirmation report from the IMN 50 that the alert has been received. The remote calling unit 30b passes this report to the alarm processor 32 for logging and activation of an ALARM RECEIVED light (not shown) on the base unit 9, and then releases the phone line for further use. In the

embodiment which includes an internal calling unit 30a rather than an external calling unit 30b, the process is the same, with the exception that the alarm message is not transmitted to the calling unit 30a wirelessly but by a hardwired interface, internal to the base unit 9.

As shown in FIG. 8, the calling unit 30 may be connected to a wired telephone network 62 or a wireless telephone network 94 or to a wired or wireless data network. In a configuration such as this, the calling unit 30 can dial out wirelessly in the event that the landline becomes unavailable (e.g., due to adverse weather conditions disrupting the public switched telephone network (PSTN), or due to a burglar's cutting telephone wires leading to an individual house). In a wireless interface, the calling unit 30 will pass information to the wireless network via any of numerous available protocols such as: CDPD (Cellular Digital Packet Data), Circuit Switched Cellular, Overhead Control Channel Technology and/or Forward Control Channel Technology. These data will be passed to a mobile telephone switching unit 94 and routed through a receiving modem 65 in the Information Management Network 50 to a processor which contains an application program interface (API) 66. This processor uses the data contained in the output signals from the modem to extract additional relevant data from a customer database 67. The processor then sends commands, containing customer-specific information, to an event notification server 68 within the IMN 50. The calling unit 30 may also be programmed to initiate transmittal of the alert message via both landline and wireless networks simultaneously, depending upon how much expense is tolerable and what level of reliability must be achieved. In either scenario, the alert message is routed to modem 65 as described above. If the base unit 9 is tampered with, the call will automatically be initiated from the calling unit 30. The calling unit 30 is not used for Emergency Exchange calls (e.g. to "911" in North America) or voice transmission calls.

TELEPHONE JACK ISOLATION SWITCHES 33

FIG. 1 shows the arrangement of the telephone isolation switches 33 within the overall system. FIG. 7 shows the interface between the base unit 9 and the telephone jack isolation switches 33. These switches 33 are controlled by wireless signals, preferably RF signals in the 300-350 MHz band, from the base unit 9, in order to disconnect any off-hook telephone or other terminal equipment at its RJ-11 jack. This is accomplished by a remote controlled double-pole double-throw (DPDT) switch or similar mechanism. Each isolation switch 33 comprises: an RJ-11 telephone jack interface module with internal RF receiver which will reside externally or internally to the wall jack surface, an input receptacle for acceptance of an RJ-11 plug, an output plug for interface with an existing RJ-11 jack (e.g. in the wall), and a power source such as a battery or line voltage converter. This device ensures that the calling unit 30 will be able to make a sensor or intentional alert notification when needed, even though someone else might be on the line or a burglar might have taken the telephone off-hook to try to prevent a call for help.

WIRELESS SENSORS & PERIPHERAL DEVICES

FIG. 1 shows schematically the sensors 25-29, capable of communicating via RF to the alarm processor 32 (FIG. 10) on any of a variety of radio frequency bands including, but not limited to, 300 MHz, 400 MHz, 900 MHz, 2.4 GHz or frequency bands designated for use according to the Bluetooth standard now under development. In order to eliminate signal interference, the base unit 9 is preferably capable of using separate frequency bands for simultaneous voice transmission and data transmission. For example, voice channel transmissions may be broadcast in the 900 MHz band, while sensor data transmissions may utilize the 300 MHz band simultaneously. Three leading security device makers are Digital Security Controls, Ltd. of Concord, Ontario, Canada ("DSC"), the ITI Technologies division of Interlogix, Inc., North St. Paul, Minnesota ("ITI"), and the Linear Corporation

subsidiary of Nortek, Inc., located in Carlsbad, California ("Linear"). The following wireless sensors/devices are commercially available and will operate within the frequency capabilities of the alarm processor (32):

- Smoke sensor (25), Linear Model DXS-72;
- Freeze detector (26), ITI Model 60-742-95R;
- Glass break detector (27), DSC model AMS 100 or
- Glass break with shock detector (27), Linear model DXT-91;
- Rate-of-rise heat sensor, ITI Model 60-460-319.5,
- CO (carbon monoxide) detector, ITI model 60-652-95;
- Motion - Passive Infrared (PIR), Linear model DXS-54;
- Smoke with sounder, DSC model WLS 906;
- Magnetic door/window sensor, Linear Model DXS-31
- Water detector, ITI model 60-744-95.

It would also be possible to use the above-described system to connect to optional medical sensors, such as those for blood pressure 28, blood sugar (glucose) level 29, pulse, etc. Such sensors are available from Hewlett-Packard, Medtronic and other vendors. The system could also connect to home automation control modules, including light, environmental, appliance and audio/visual control devices (not shown), various models of which are available from ITI and DSC (mentioned above) and other companies.

PERSONAL COMMUNICATOR DEVICE 10

As shown in FIG. 5, a preferred embodiment of the present invention includes a portable wireless device, the Personal Communicator Device 10, which contains a HELP button 12, a TALK button 14, a microphone 16, a speaker 18, and a built-in antenna 20. When one of the buttons is pressed, this generates either a Data Alert Message 22 or opens a Direct Dial Voice Line 24. Data may be sent, for example, at 300 MHz and voice at 900 MHz or 2.4 GHz, although in subsequent embodiments, both data and voice transmissions may utilize 900 MHz, 2.4 GHz or other available frequencies. A suitable transmitter circuit is model MC13146 and

a suitable receiver circuit is model MC13145, both available from MOTOROLA, INC. (Phoenix, Arizona, USA). These circuits are operable in both the 300 MHz band and the 900 MHz band. If the TALK button 14, or optionally another button (not shown), is pressed, the base unit 9 dials an emergency number (e.g. "911" in North America) directly and, in some configurations, upon termination of the "911" call, an alert notification is sent from the base unit 9 through the calling unit 30 to the Information Management Network 50, which then sends an automated message to alert the owner or designated individual that an emergency call has been made. This alert can be sent via in any desired form, such as voice, data or fax messaging, to any of a variety of receiving terminals, such as a pager, cell telephone, Personal Digital Assistant (PDA), email, Wireless Application Protocol (WAP)-enabled device, or fax. Alternatively, if the HELP button is pressed, a data alarm message 22 is sent to the IMN 50 and is forwarded from there to the customer's choice of receiving devices.

CALL CENTER BUTTON 84

As shown in FIG. 8, the base unit 9 contains a CALL CENTER button 84. This button may operate as an autodialer to connect the Base Unit 9 to an Interactive Voice Response (IVR) system 82 (FIG. 8) through the IMN 50, for the user to access customer service and other automated services through the network, including modifying his profile in a database.

FIGS. 9A-9B show a suitable format for the information provided by a customer or user, which is stored in the Information Management Network. All transactions between the base unit 9 and the IMN 50 will be logged into a database event log 79 in the IMN, and into a similar log in the base unit 9.

INFORMATION MANAGEMENT NETWORK 50

The Information Management Network (IMN) 50 is shown in FIGS. 1 & 8, and is the combination of a DTMF modem 65, a message renderer 69, an Application Program Interface (API) 66, a series

of servers containing customer information databases 67, a unified messaging platform, an event log, a web interface, and a Private Branch Exchange/Interactive Voice Response unit 82. In combination with the base unit 9, the calling unit 30, telephone isolation switches 33 and sensors 25-29, the IMN 50 provides an automated notification system capable of receiving alert inputs from wireline, wireless, or cable communication networks, and capable of delivering an alert message notification to specified points of contact via the wide range of commercially available communications media.

In a wired embodiment of the communications interface, a sensor alert transmission to the alarm processor 31 results in the calling unit (30a or 30b) converting the alert message to DTMF signals 61A. These signals are then forwarded to a Local Exchange Carrier (LEC) 62 which in turn, transmits the data over a Public Switched Telephone Network (PSTN) 64 to the IMN 50 via a predetermined phone number into a DTMF Modem 65. An acknowledgement/negative acknowledgement (ACK/NACK) query is exchanged with the calling unit 30a or 30b, indicating that the modem 65 has received the information. This ACK/NACK exchange indicates to the base unit 9 that the data have been received, and the base unit 9 stores this information in an event log in the alarm processor 32 and illuminates an ALERT RECEIVED indicator (not shown) on the Base Unit 9.

The modem then converts the DTMF analog signals 61A to digital signals and passes the data to an Application Program Interface (API) 66 residing on a customer database server 67 operating according to a standard commercially available database program such as SQL (Structured Query Language). The API 66 evaluates a data stream header field, forming part of the received digital signals, and extracts specific alert information such as station ID and type of alarm (motion sensor, window sensor, etc.). The API 66 provides this data to other programs

running on the SQL customer database server 67, for further processing.

The customer database server 67 then generates and sends an alarm notification to an event notification server 68 which contains pre-designated customer contact information. The event notification server 68 forwards the data to a message renderer 69, which converts it into the format(s) required for respective appropriate event servers 70. These include, but are not limited to a phone server, a fax server, a pager server, an e-mail server, a cell server, or even a manned monitoring center 71. As shown at the bottom of FIG. 2, a human security representative (not shown) in the manned monitoring center 71 will be alerted that customer's location has had a sensor alert transaction. After successfully sending the alerts and notifications, the IMN 50 issues a confirming report that an alert has been received and passes this information to the database event log 79 for retention as transaction history. The server/database 67, event log 79 and the alarm processor 32 will maintain a record of confirmation that the alert messages were in fact received. The customer database server 67 will pass notification of any message transaction to a customer access database 78.

As shown in the right half of FIG. 8, the customer access database 78 can be accessed via the global computer network 91 with a Web interface through a protective firewall 75 and ETHERNET® connection 76 or via standard telephone lines through a PBX/IVR 82 interface. Access to the customer access database 78 facilitates input and modification of user notification profile information and retrieval of sensor alert records to determine alarm activation and test history. Any input or modification to user notification profile records will be initiated in the customer access database 78, which in turn, will forward relevant profile information to the customer database server 67 for event retrieval. This functionality inhibits unauthorized electronic access to the customer database and server 67. The use of a

Personal Identification Number (PIN) validation query (not shown) provides the user with secure and personal access to his database information. As previously noted, suitable security protocols are well known and are available from vendors such as VERISIGN, ENTRUST, and Baltimore Technologies.

MANNED MONITORING CENTER 71

Optionally, as shown in FIGS. 1 & 8, the user can elect for the IMN 50 to notify the Manned Monitoring Center 71 (MMC) of the alarm. The operator at the MMC 71 will then call the unit location and speak with the customer or listen through the base unit 9 or PCD 10 microphone for abnormal sounds in the customer's residence, in order to verify the alarm. If the alarm is determined to be valid, the MMC 71 notifies the appropriate public safety officials (fire, police, campus or nursing home security).

MODE OF OPERATION--MAJOR EVENTS/SCENARIOS:

System operation is organized around several "events" or system operational scenarios, as described below:

ALERT EVENT

A flow diagram of an alert event sequence is depicted in FIG. 2. An alert event is initiated when a sensor is activated at step 101 or a distress button is pressed, such as HELP button 12 on the Personal Communicator Device 10 (FIG. 5). The signal from one of these peripheral devices passes, in the form of an RF signal, to the alarm processor 32 (see FIG. 5, left and FIG. 10, left). The alarm processor 32 correctly decodes and validates the alarm signal at step 103 (FIG. 6). If the signal denotes a security sensor activation, and the system is in the ALERT ARMED mode, an audible siren (not shown) is sounded within the base unit 9 and remotely, if an optional remote siren (not shown) is installed. If the system is in the UNARMED or CHIME ONLY mode, the alarm processor 32 takes no action or rings the chime, respectively. If the event is initiated by a smoke sensor 25

(FIG. 1), the internal siren (not shown) will sound, regardless of armed or disarmed status.

In the event of activation of a security sensor 27 (FIG. 1) while the system is armed or activation of a smoke sensor 25, the alarm processor 32 assembles an alarm message at step 104, sends it to the calling unit 30 and waits a brief period of time for alarm cancellation. If the alarm is not cancelled within the prescribed period, the base unit 9 seizes the line and sends a signal (preferably 300 MHz) to the telephone isolation switches 33, as shown in FIG. 7, directing the switches to isolate all telephone jacks.

According to an alternate scenario (FIG. 8, top left), the base unit 9 initiates a wireless data call through a wireless transmitter using Personal Communications Services (PCS), cellular or long range radio protocols 61B. The base unit 9 dials an access number of the IMN 50. In any event, this alarm message includes the unit ID, unit telephone number, alarm type, zone, whether it is a test, and the IMN 50 access number to be dialed. The calling unit 30 receives the alert information from the alarm processor 32 via a wired or wireless interface and validates it in step 103.

In the embodiment comprising a separate calling unit 30b, the signal is transported wirelessly via RF between the alarm processor 32 and the calling unit 30b. The calling unit 30b then stores the message in step 105 and waits a brief period of time for alarm cancellation. Cancellation is accomplished if an authorized user enters a correct code 112 (FIG. 2, top right) via the keypad on the base unit 9 or a remote keypad unit (not shown), and the entry is logged at step 113. If the alarm is not cancelled within the prescribed period of time, the calling unit 30 seizes the telephone line at step 106 and sends a signal to the telephone isolation switches 33 to isolate all premises telephone jacks.

According to another alternate scenario, the calling unit 30

initiates a wireless data call through a wireless transmitter using PCS, cellular or Long Range Radio (61B) protocols. The calling unit 30 dials the access number for the IMN 50. When a connection is established with the IMN 50 via the modem 65, the alert event message data is passed to the API 66 for conversion and transfer into the event notification server 68, as shown in FIG. 8. The calling unit 30 stays connected, awaiting an acknowledgment (ACK/NAK) verification message from the IMN 50 that the alarm message has been received, authenticated and validated. This is indicated by the leftward-pointing arrow from modem 65 in FIG. 8. In step 107, the calling unit 30 then initiates a log entry in the alarm processor (32) and, in step 108, releases control of the phone line. Then, in step 109, the IMN 50 sends alerts as previously instructed by the owner of the base unit.

If the customer chooses to subscribe for the services of a manned monitoring center (MMC) 71, the IMN 50 directs an alert notification message to the MMC 71. Then, in step 110 (FIG. 2), the MMC 71 will attempt to send alert messages to verify the alert condition via a direct telephone call to the base unit 9. Following standard monitoring center protocols, a verified alert event notification will result in a call to public safety officials such as fire, police and/or emergency medical technicians (step 111).

To end the event, a password-protected re-set can be accomplished through the base unit 9 or remotely via the PSTN line (step 112), and is logged in the alarm processor for display on the base unit (step 113). Alert siren termination is accomplished via the password reset or via a pre-selected time-out function (ex. 5, 10, 15 minutes).

RESET, INQUIRY OR RECONFIGURATION EVENT (FRONT PANEL)

FIG. 3 presents the flow of information in a reset, inquiry or reconfiguration event. A reset, inquiry, or reconfiguration event occurs when the alarm processor 32 configuration or

operational status is changed, or the alarm processor 32 is asked to provide alarm or configuration information to an authorized user who has the correct password or to the IMN 50. The two-way information flow capability of the desired invention is accomplished by the telephone processor 31 passing DTMF control and inquiry signals to the alarm processor 32. In a reset or re-configuration event, the user generates keypad input signals to enter or change a password, reset the unit, turn the unit on or off, delete or add zones and Sensors, change alarm options or thresholds. Alarm processor-directed synthesized voice prompts guide the user through the available change/inquiry options. Alternatively, the user can call the IMN 50 using a PBX/IVR, or access the IMN 50 via the global computer network to accomplish reset, reconfiguration, and other control options (115).

PERSONAL COMMUNICATOR DEVICE 10 ALARM EVENT

The Personal Communicator Device 10 contains three or more special function buttons which facilitate the following communication transactions:

- 911 Emergency Exchange Call

- Programmed Speed Dial to contact desired phone numbers
(i.e., doctor, family, friend)

- Personal Distress Alert Notification

FIG. 5 shows the interface between the personal communicator device 10 and the base unit 9. Programmed Speed Dial calls and 911 Emergency Exchange calls are accomplished by the telephone processor 31 in a manner consistent with a normal base unit 9 telephone call.

As shown in FIG. 6, activation of a "911" emergency exchange call initiates an alert message to the IMN 50 for notification to the designated points of contact advising that a 911 emergency exchange call has been placed from the base unit 9. The third type of alarm, the Personal Distress Alert, is processed by the alarm processor 32 as a sensor alert signal to the IMN 50. Notification procedures for this type of sensor

alert message are depicted in FIG. 2. Specific contact and response actions are defined by the instructions which the user has programmed into his personal database profile. If the user has subscribed to the manned monitoring center 71 option, the IMN 50 will forward an alert message to the MMC 71 for verification and assistance.

It will be apparent to those active in the security and medical monitoring fields that various changes and modifications are possible within the scope of the inventive concept. In particular, features of one embodiment could be combined with features of another embodiment. Therefore, the invention is not limited to the specific embodiments shown and described, but rather is defined by the following claims.

WHAT IS CLAIMED IS:

1. A combination telephone and monitoring system,
comprising
a base unit (9) having a transceiver for wireless
communication with a plurality of peripheral devices (10, 25-29);
a calling unit (30) in communication with said base unit (9)
and containing means for automatic dialing out to a remote
location and for transmitting Dual Tone Multiple Frequency (DTMF)
signals;
at least one peripheral device (10, 25-29) having a
transceiver adapted for wireless local communication (22,24) with
said base unit (9) and
means (12, 14) for generating information concerning at
least one state or condition of a person or premises, for
relaying by said calling unit to said remote location.
2. The system of claim 1, wherein said base unit (9) and
said calling unit (30a) are contained in a common housing.
3. The system of claim 1, wherein said base unit (9) and
said calling unit (30b) are separate units.

4. The system of claim 3, wherein said base unit (9) and said calling unit (30b) are separate units which communicate with each other by radio signals.

5. The system of claim 1, further comprising a telephone processor (31) for receiving and interpreting DTMF signals via a public switched telephone network (PSTN).

6. The system of claim 1, further comprising a telephone processor (31) for receiving and interpreting DTMF signals via a wireless communications network.

7. The system of claim 6, wherein said DTMF signals represent commands, and said system reprograms itself in accordance with said commands received as DTMF signals.

8. The system of claim 1, further comprising at least one isolation switch (33), responsive to a control signal from said calling unit (30), for electrically isolating any terminal equipment from a telephone jack associated therewith, when commanded by said calling unit, in order to give said calling unit exclusive use of a telephone line (92) connected to said jack.

9. The system of claim 8, wherein said isolation switch includes means for receiving commands from said base unit (9) wirelessly.

10. The system of claim 9, wherein said means for receiving commands wirelessly is a radio receiver.

11. The system of claim 10, wherein said radio receiver operates in a 300 MHz frequency band.

12. The system of claim 1, wherein said peripheral device is a personal communicator (10) having means to exchange both voice and data signals (22, 24) bidirectionally with said base unit.

13. The system of claim 1, wherein said peripheral device is a medical sensor adapted to report a physiological condition of a person to said base unit, for relaying to said remote location.

14. The system of claim 1, wherein said peripheral device is a premises sensor adapted to generate an alert message upon occurrence of at least one predetermined condition or event within a predetermined sensing range of said premises sensor.

15. The system of claim 1, wherein said system transmits, to said remote location, a unique identifier as a sequence of Dual-Tone Multi-Frequency (DTMF) tones.

16. A personal communicator (10) having
a transceiver capable of transmitting both voice and data signals (22, 24) to a transceiver-equipped telephone base unit up to 100 meters away;
a microphone and speaker coupled to said transceiver for exchanging voice communications with said base unit; and
at least one touch-sensitive element adapted for triggering transmission of a distress data signal, indicating that the person touching said element is requesting assistance, to said telephone base unit.

17. The communicator of claim 16, wherein said transceiver, microphone and speaker operate as a speakerphone for voice communications relayed by said base unit to and from an external network.

18. The communicator of claim 16, further comprising memory means for storing data representing any of a plurality of different signals to be sent upon actuation of said touch-sensitive element.

19. An information management network for storing profiles of customers and responding to an alert signal concerning a particular customer by generating at least one message to recipient(s) predesignated by said customer in his/her/its profile, comprising:

means (65) for receiving said alert signal from a remote location and translating said alert signal into digital data representing a source of said alert signal;

database means (67) for associating said source of said alert signal with a profile previously stored by said customer;

an event notification generator (67), responsive to output signals from said database means, for generating at least one message about said alert signal to recipient(s) predesignated by said customer in said customer's profile; and

a message renderer (69) which transmits said at least one message to said recipient(s) via a predesignated medium.

19. An information management network for storing profiles of customers and responding to an alert signal concerning a particular customer by generating at least one message to recipient(s) predesignated by said customer in his/her/its profile, comprising:

means (65) for receiving said alert signal from a remote location and translating said alert signal into digital data representing a source of said alert signal;

database means (67) for associating said source of said alert signal with a profile previously stored by said customer;

an event notification generator (67), responsive to output signals from said database means, for generating at least one message about said alert signal to recipient(s) predesignated by said customer in said customer's profile; and

a message renderer (69) which transmits said at least one message to said recipient(s) via a predesignated medium.

20. The network of claim 19, wherein said predesignated medium includes at least one of:

- A) a telephone call;
- B) a fax transmission;
- C) a paging message;
- D) an e-mail message;
- E) an optically transmitted signal;
- F) a radio transmission; and
- G) a sound signal.

21. The information management network of claim 19, further comprising means for generating a voice or data message and transmitting said voice or data message to a human operator (71).

22. The information management network of claim 19, wherein said database means further decodes a portion of said alert message as an event code, and said event notification generator communicates to said recipient(s) what kind of event has occurred.

23. The information management network of claim 19, wherein said profile includes health information concerning said customer, and said event notification generator communicates a relevant portion of said health information to said predesignated recipient(s), according to authorization from said customer.

24. The information management network of claim 19, further comprising means (78) for said customer to remotely revise contents of said customer's stored profile via telephone or global computer network.

25. The information management network of claim 20, further comprising means for said customer to authorize another person to access and revise contents of said customer's stored profile, and to determine whether a person seeking to access or revise a profile is in fact authorized to do so.

26. The information management network of claim 19, wherein said means for receiving and translating an alert signal includes a decoder (65) of Dual-Tone Multi-Frequency (DTMF) audio signals.

27. The system of claim 1, wherein said peripheral device is a circuit connected to an appliance which reports on a state or configuration of said appliance and accepts commands for controlling said state or configuration.

28. A method of remotely monitoring medical condition of a living organism, comprising the steps of:

placing a medical sensor (25-29) on the organism and, upon occurrence of any of a plurality of predetermined conditions, transmitting a wireless alert message from said sensor to a base unit (9);

connecting said base unit (9) via a public communications network (92) to a remote monitoring location and relaying information contained in said alert message to said remote monitoring location;

decoding (65) said alert message to identify which organism is the subject of the alert message;

retrieving (67) a previously stored profile concerning said organism; and

generating and transmitting (68) notifications to predesignated recipient(s) in accordance with information contained in said alert message and said previously stored profile.

29. The method of claim 28, wherein said medical sensor is responsive (16) to a verbal expression by said organism.

30. A method of monitoring condition of a location, comprising the steps of

- placing a sensor at the location and, upon occurrence of any of a plurality of predetermined conditions, transmitting a wireless alert message from said sensor to a base unit (9);
- connecting said base unit (9) via a public communications network (92) to a remote monitoring location and relaying information contained in said alert message to said remote monitoring location;
- decoding said alert message to identify which location is the subject of the alert message;
- retrieving a previously stored profile concerning said location; and
- generating and transmitting notifications to predesignated recipient(s) in accordance with information contained in said alert message and said previously stored profile.

31. A method of remotely controlling and configuring a premises monitoring system having means for receiving and interpreting Dual Tone Multiple Frequency (DTMF) signals, comprising the steps of:

making a connection via a public network from a remote location to a base unit located at premises to be controlled;

identifying the calling party at said remote location as a party authorized to instruct said premises monitoring system;

receiving a sequence of DTMF signals via said connection from said calling party;

converting said DTMF signals into digital form;

interpreting said digital signals as a sequence of prearranged commands; and

controlling and configuring said monitoring system in accordance with said commands.

32. The method of claim 31, further comprising, after said identifying step, a step of reporting to said calling party information concerning a current or former state of said premises monitoring system.

33. A cordless telephone including transmitter/receiver means for exchanging voice communications on a first radio frequency with a first wireless peripheral device while simultaneously exchanging data communications on a different radio frequency with said first wireless peripheral device or with a second wireless peripheral device.

34. A corded telephone including transmitter/receiver means for exchanging voice communications on a first radio frequency with a first wireless peripheral device while simultaneously exchanging data communications on a different radio frequency with said first wireless peripheral device or with a second wireless peripheral device.

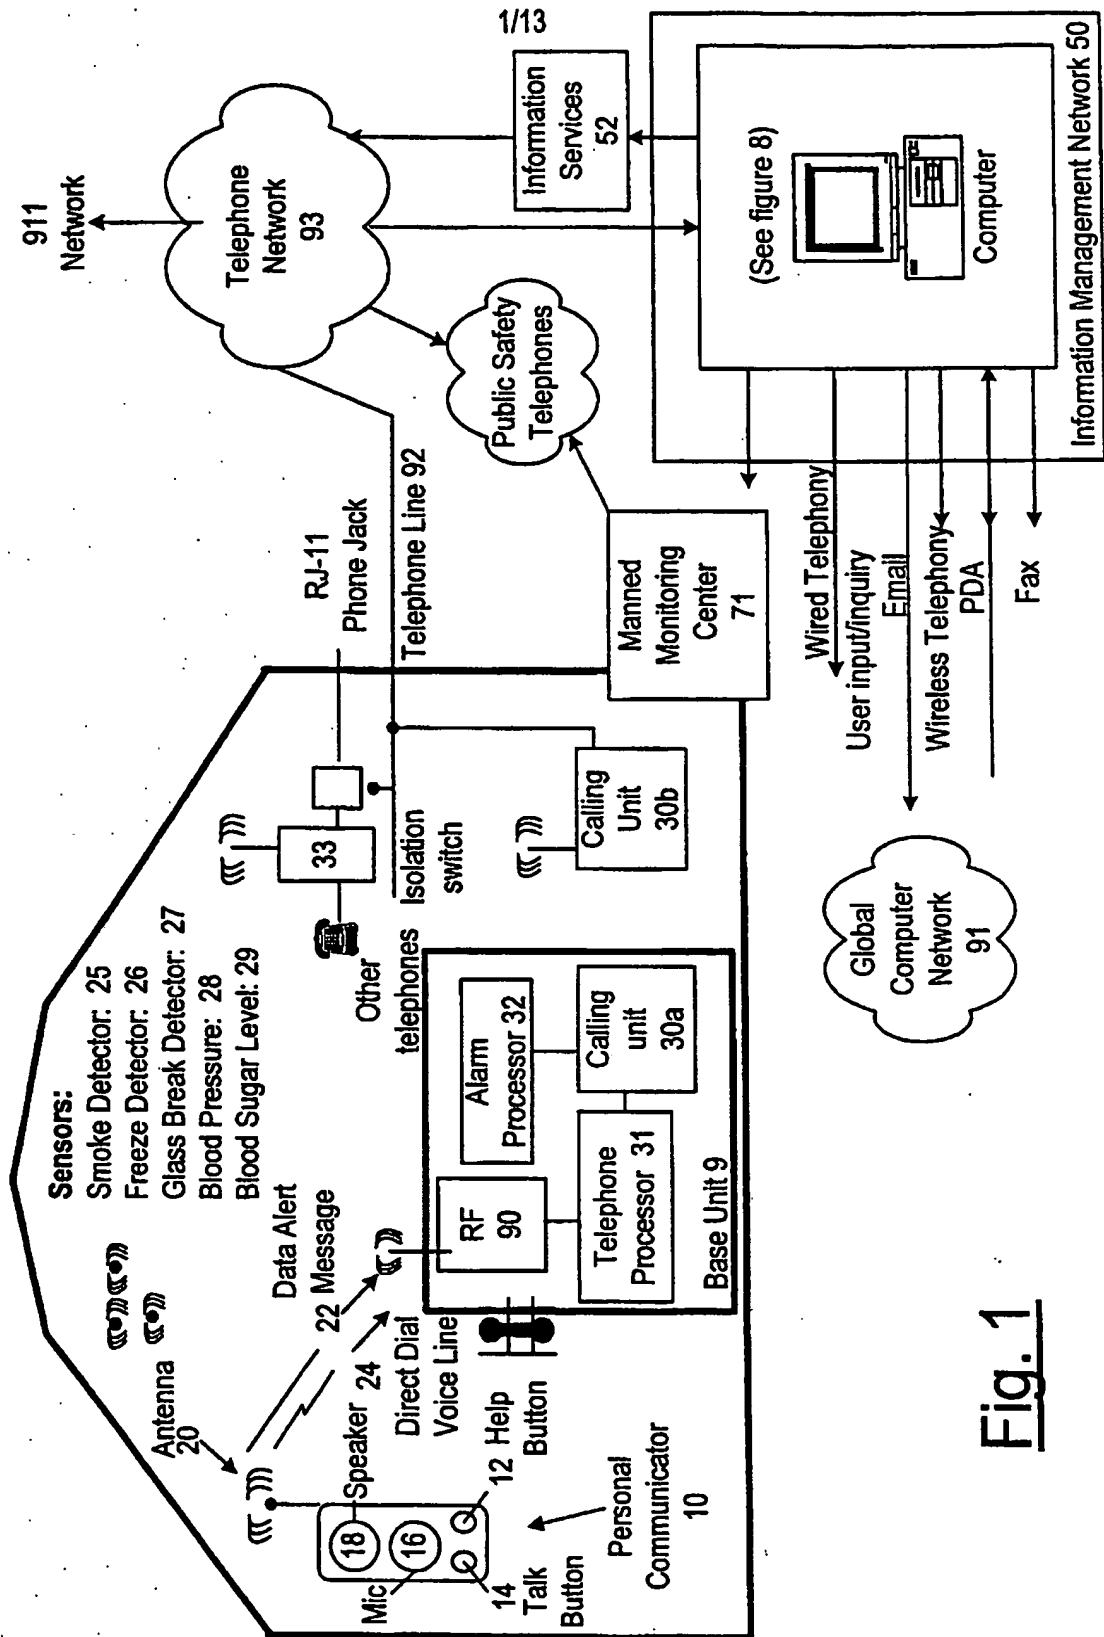
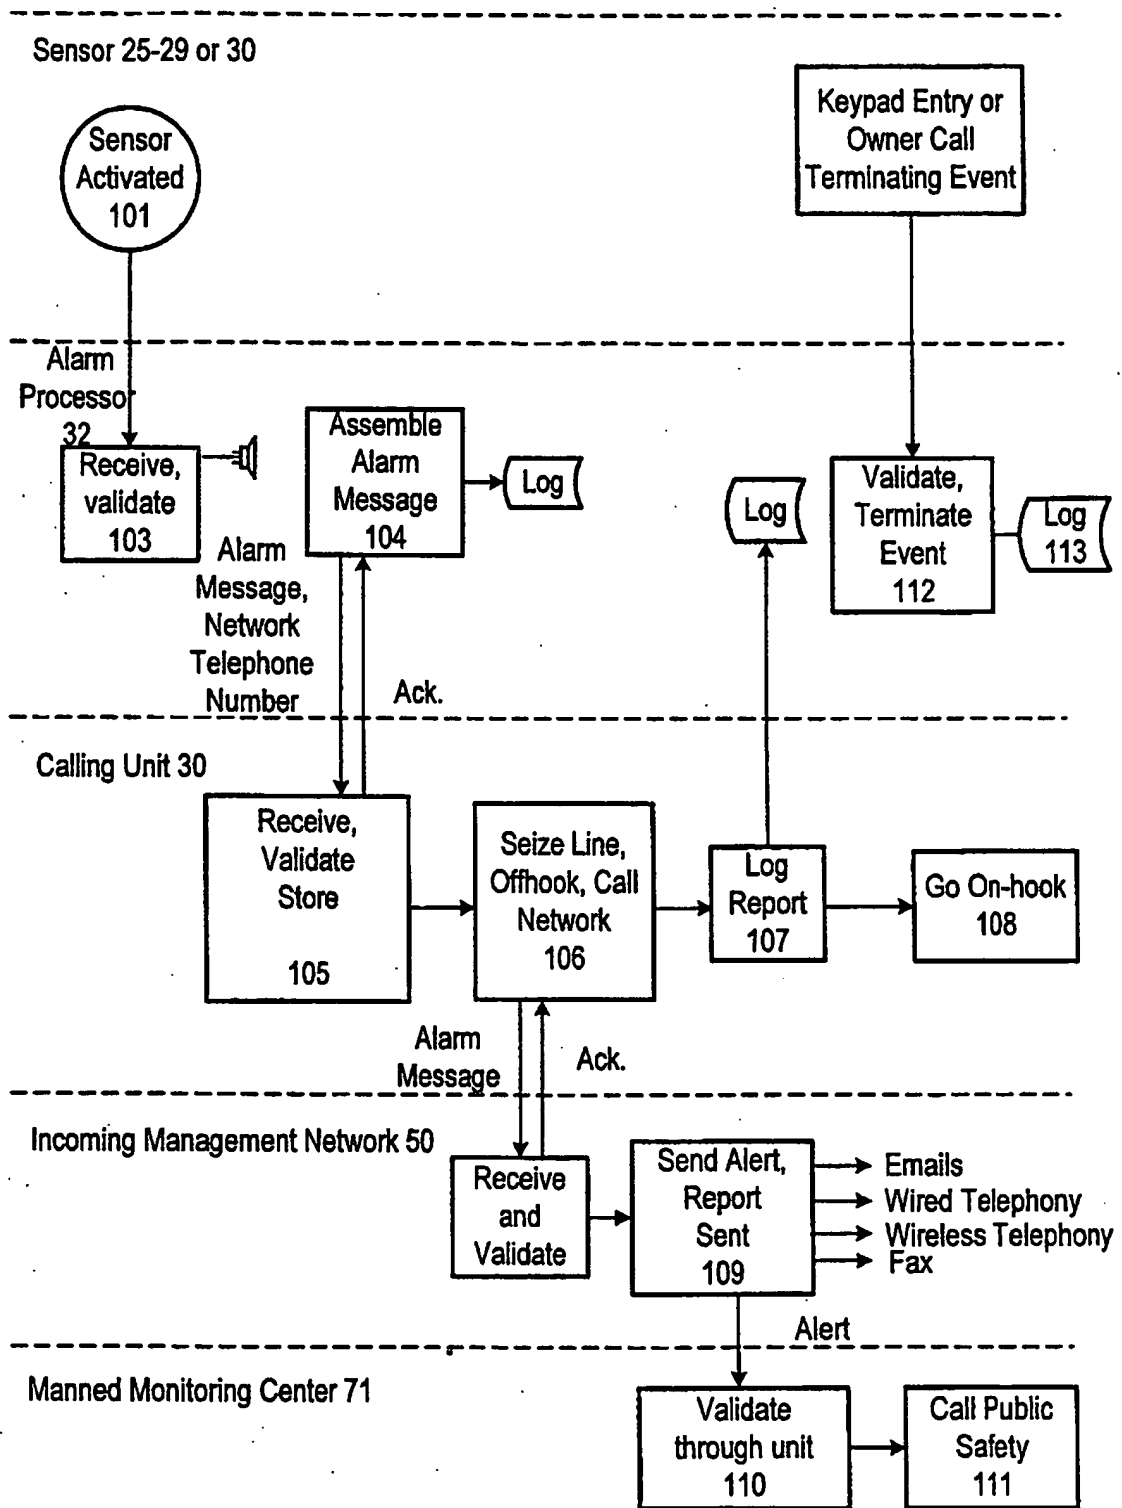


Fig. 1

Fig. 2

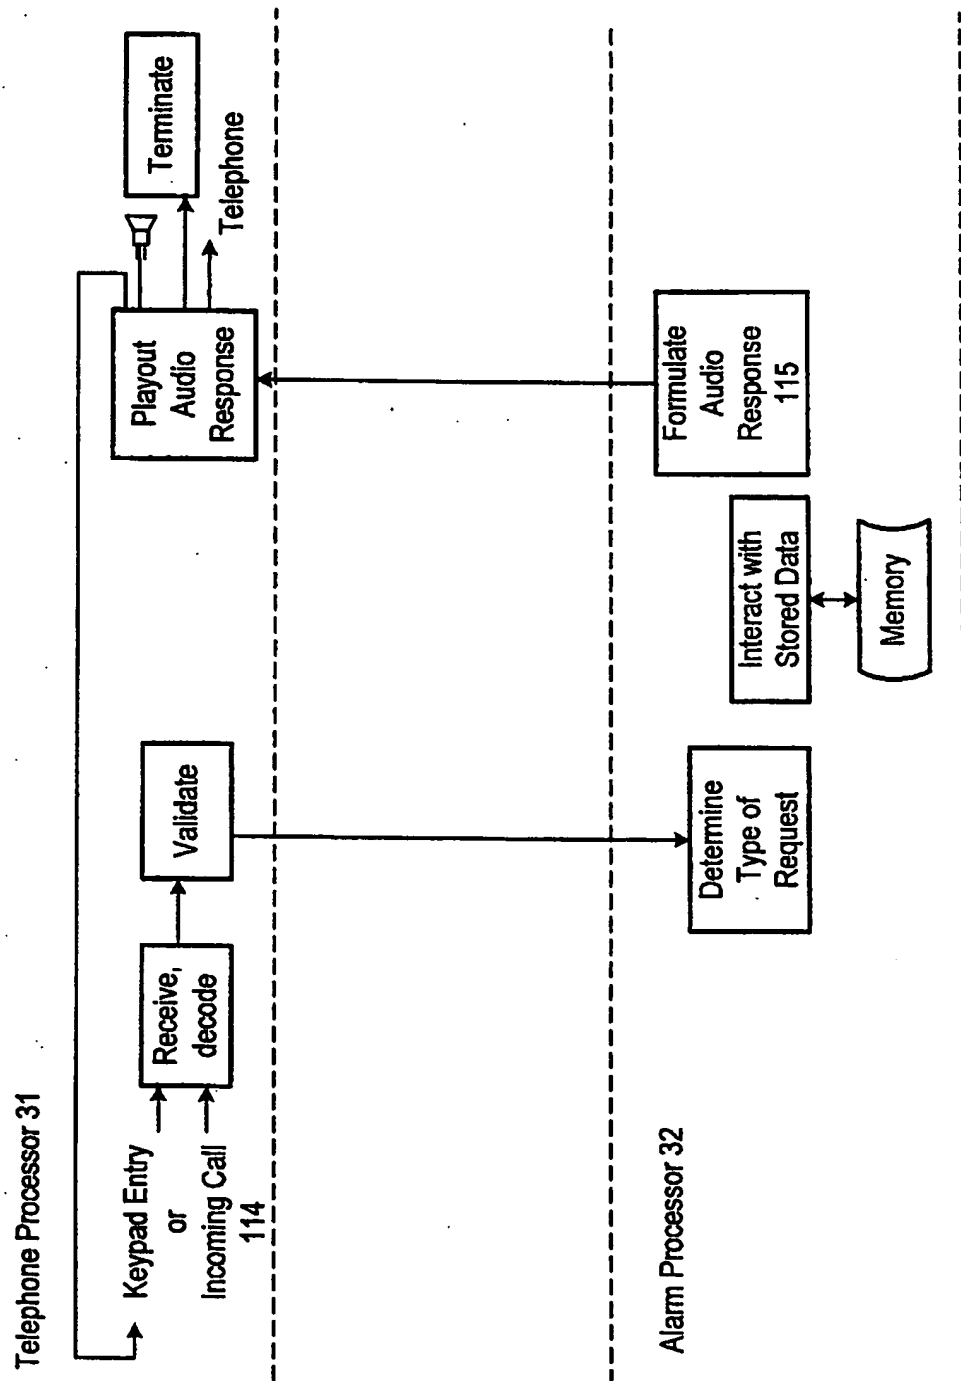


Fig. 3

4/13

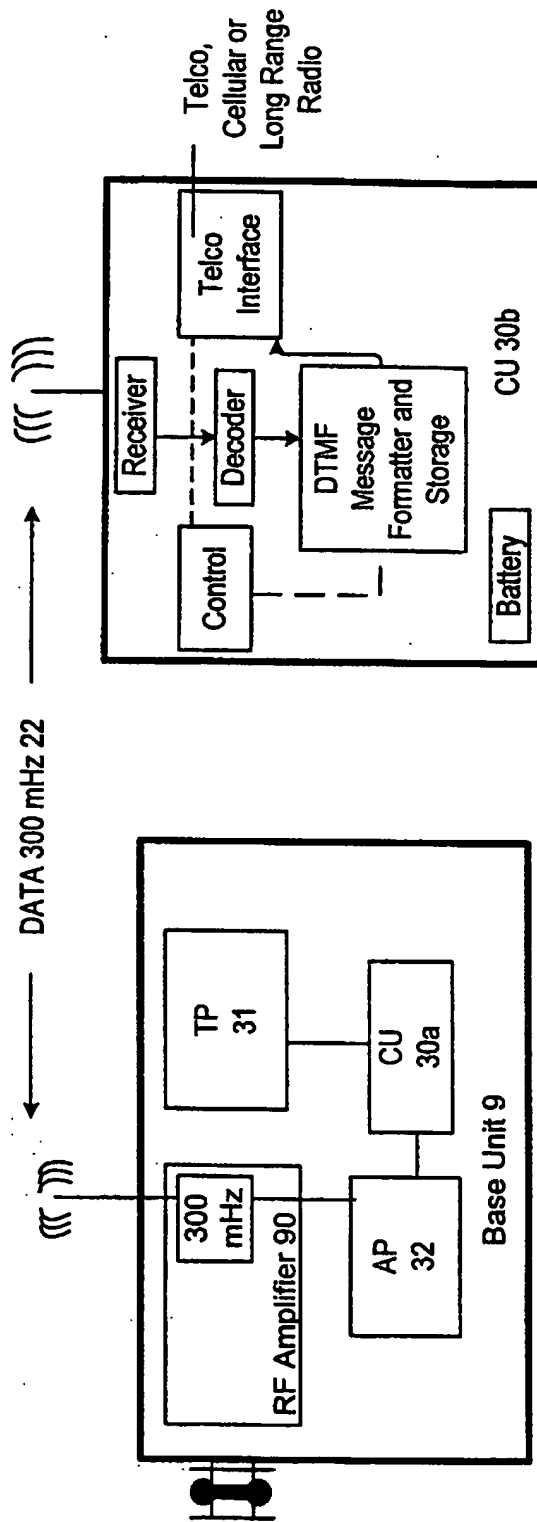


Fig. 4a

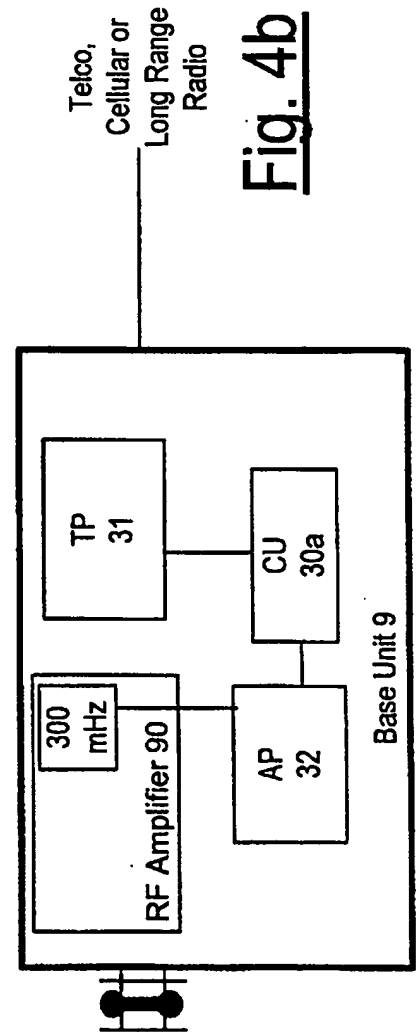


Fig. 4b

4/13

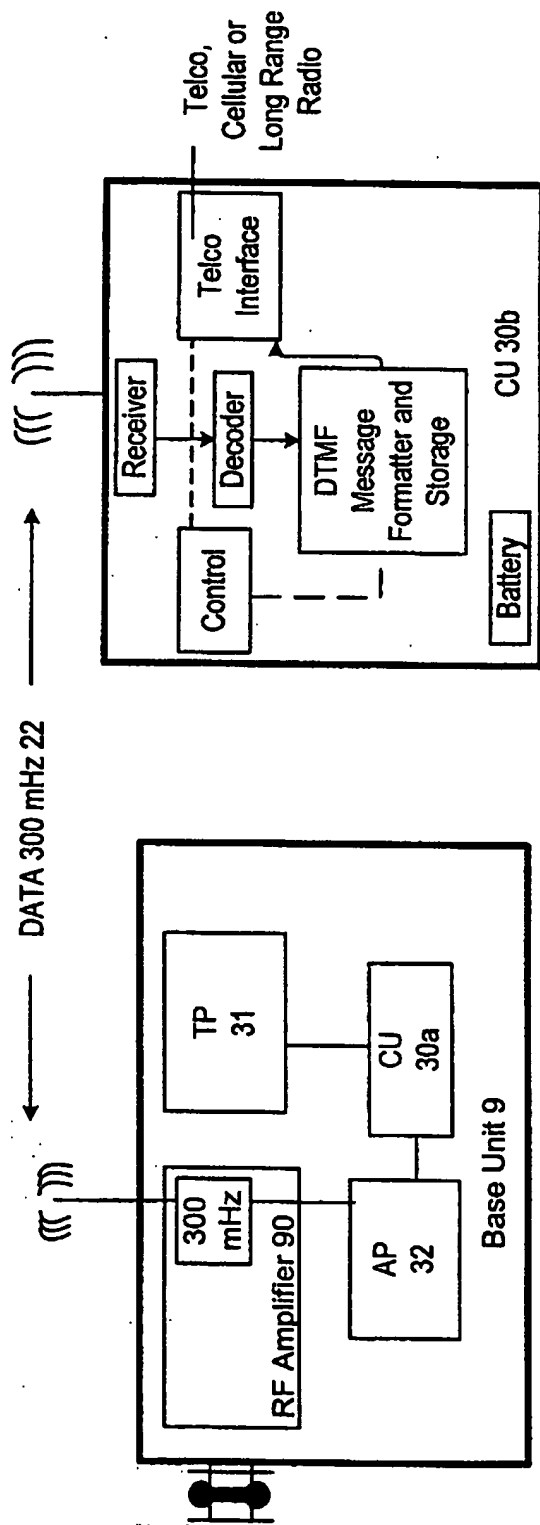


Fig. 4a

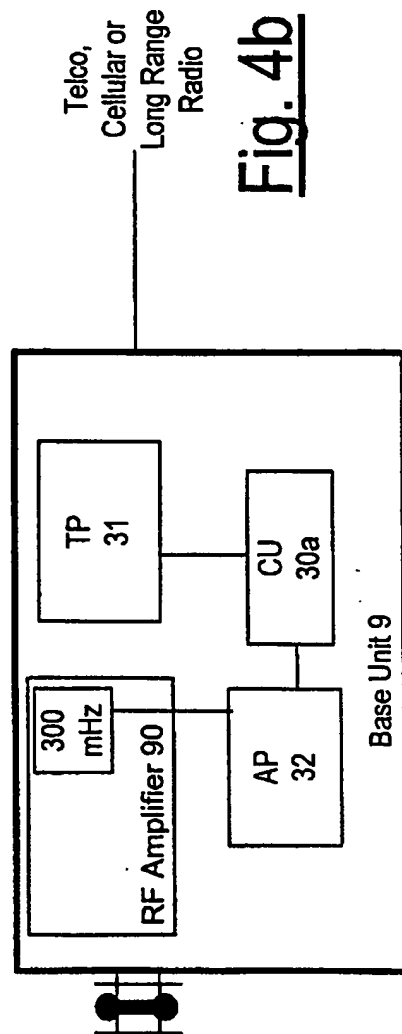


Fig. 4b

5/13

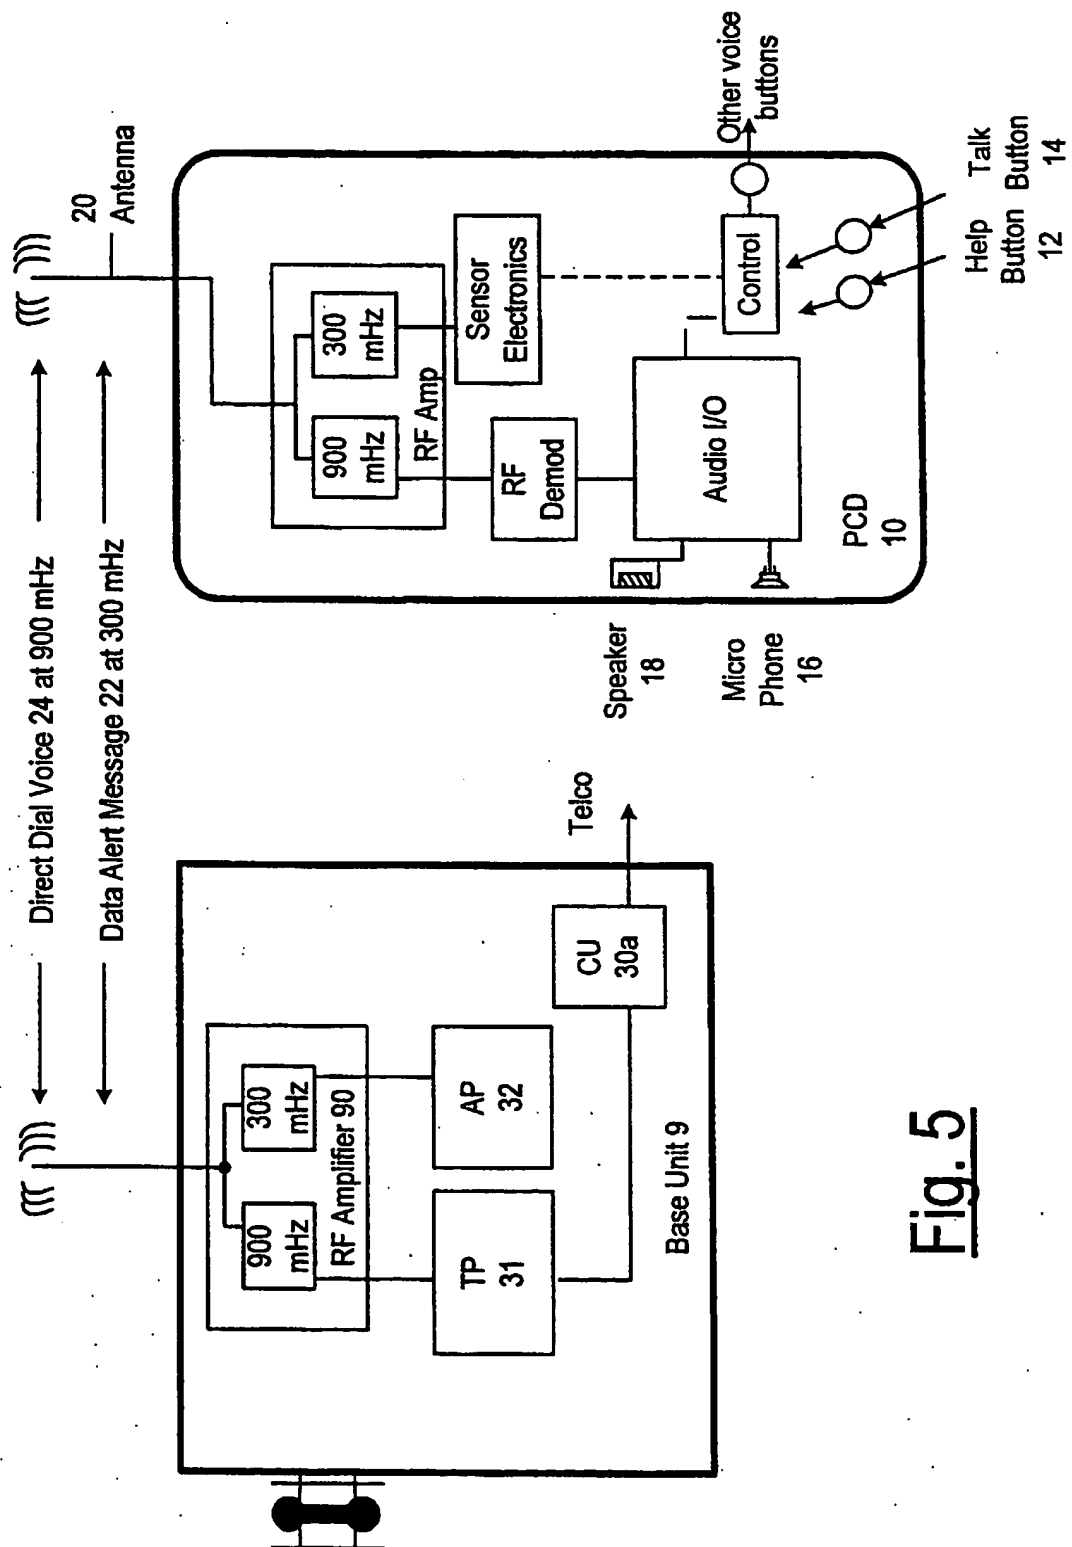


Fig. 5

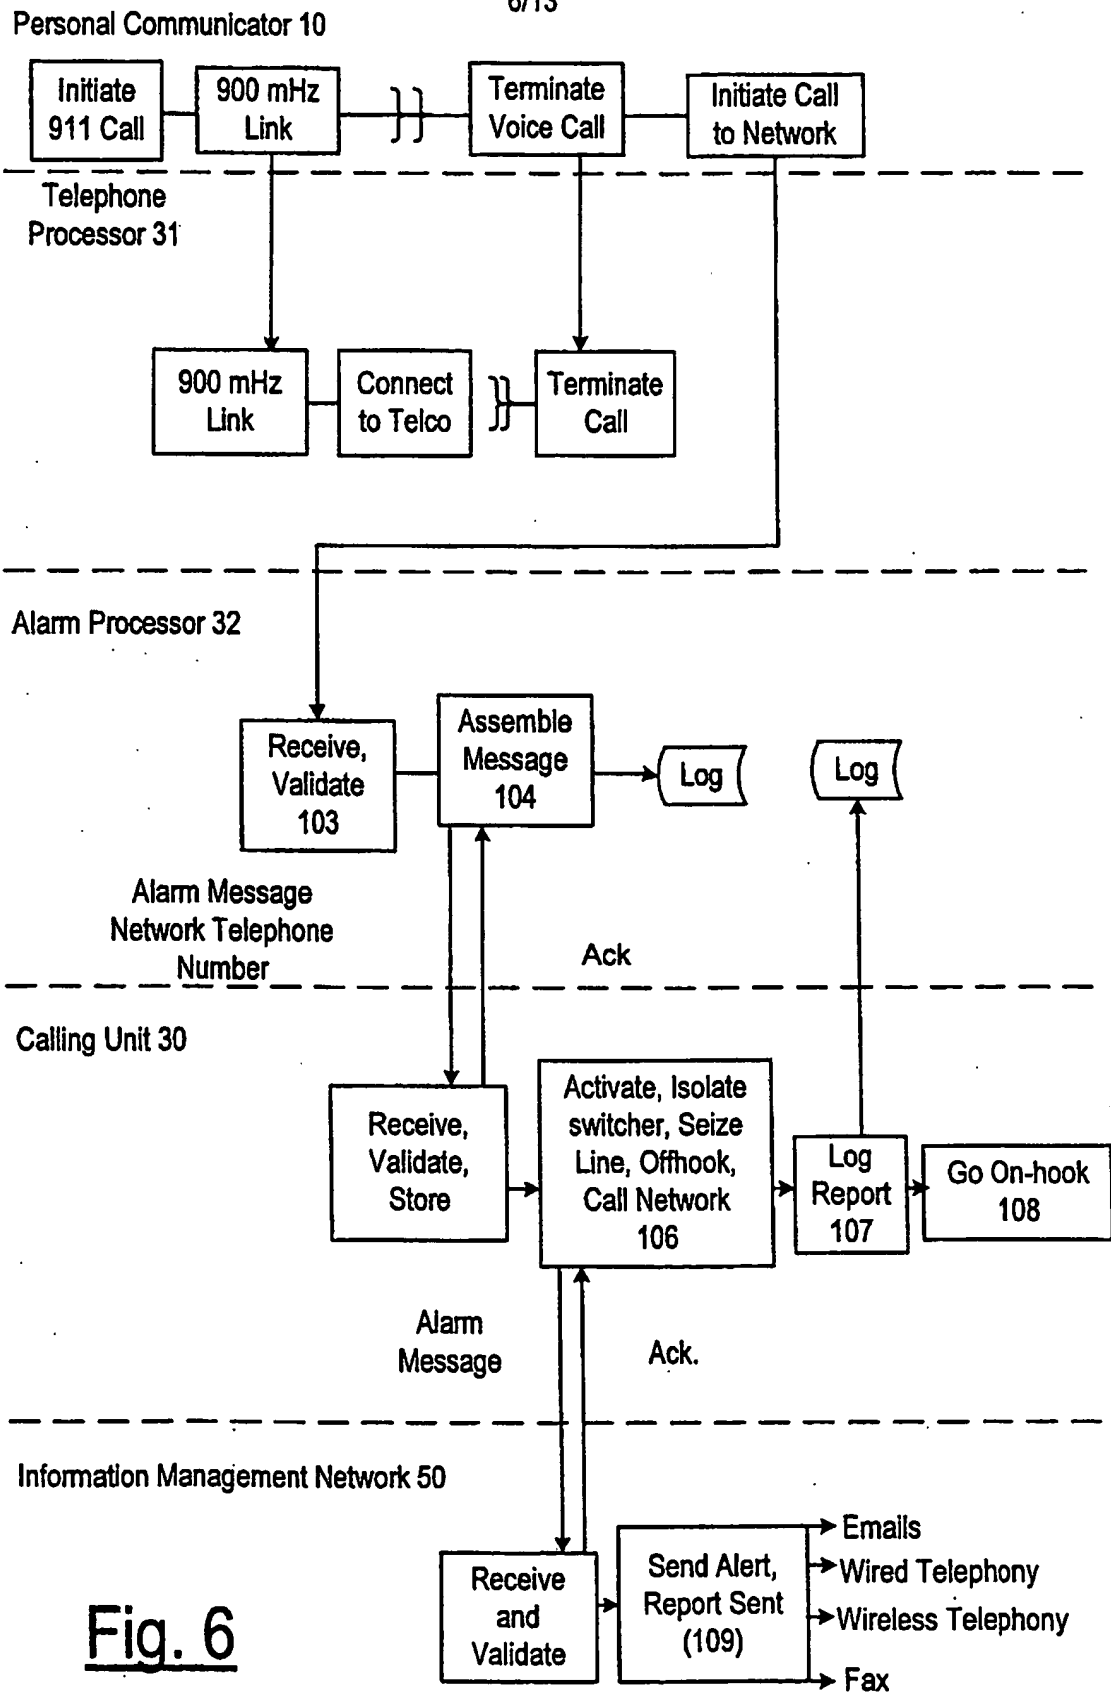
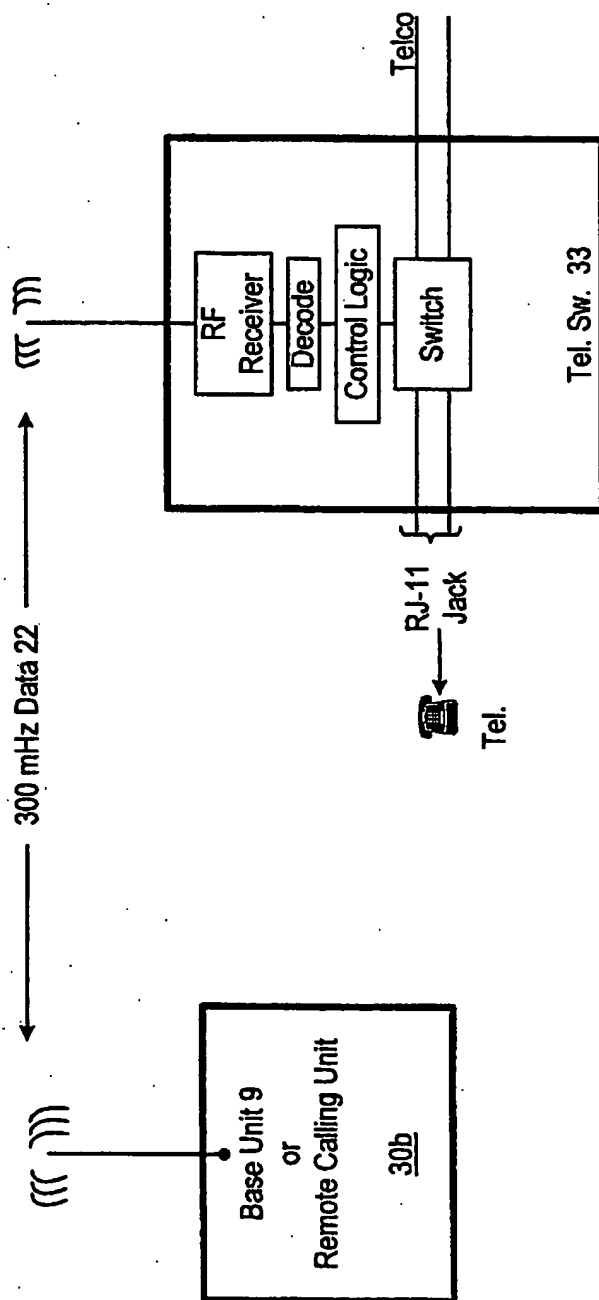


Fig. 6

7/13

Fig. 7

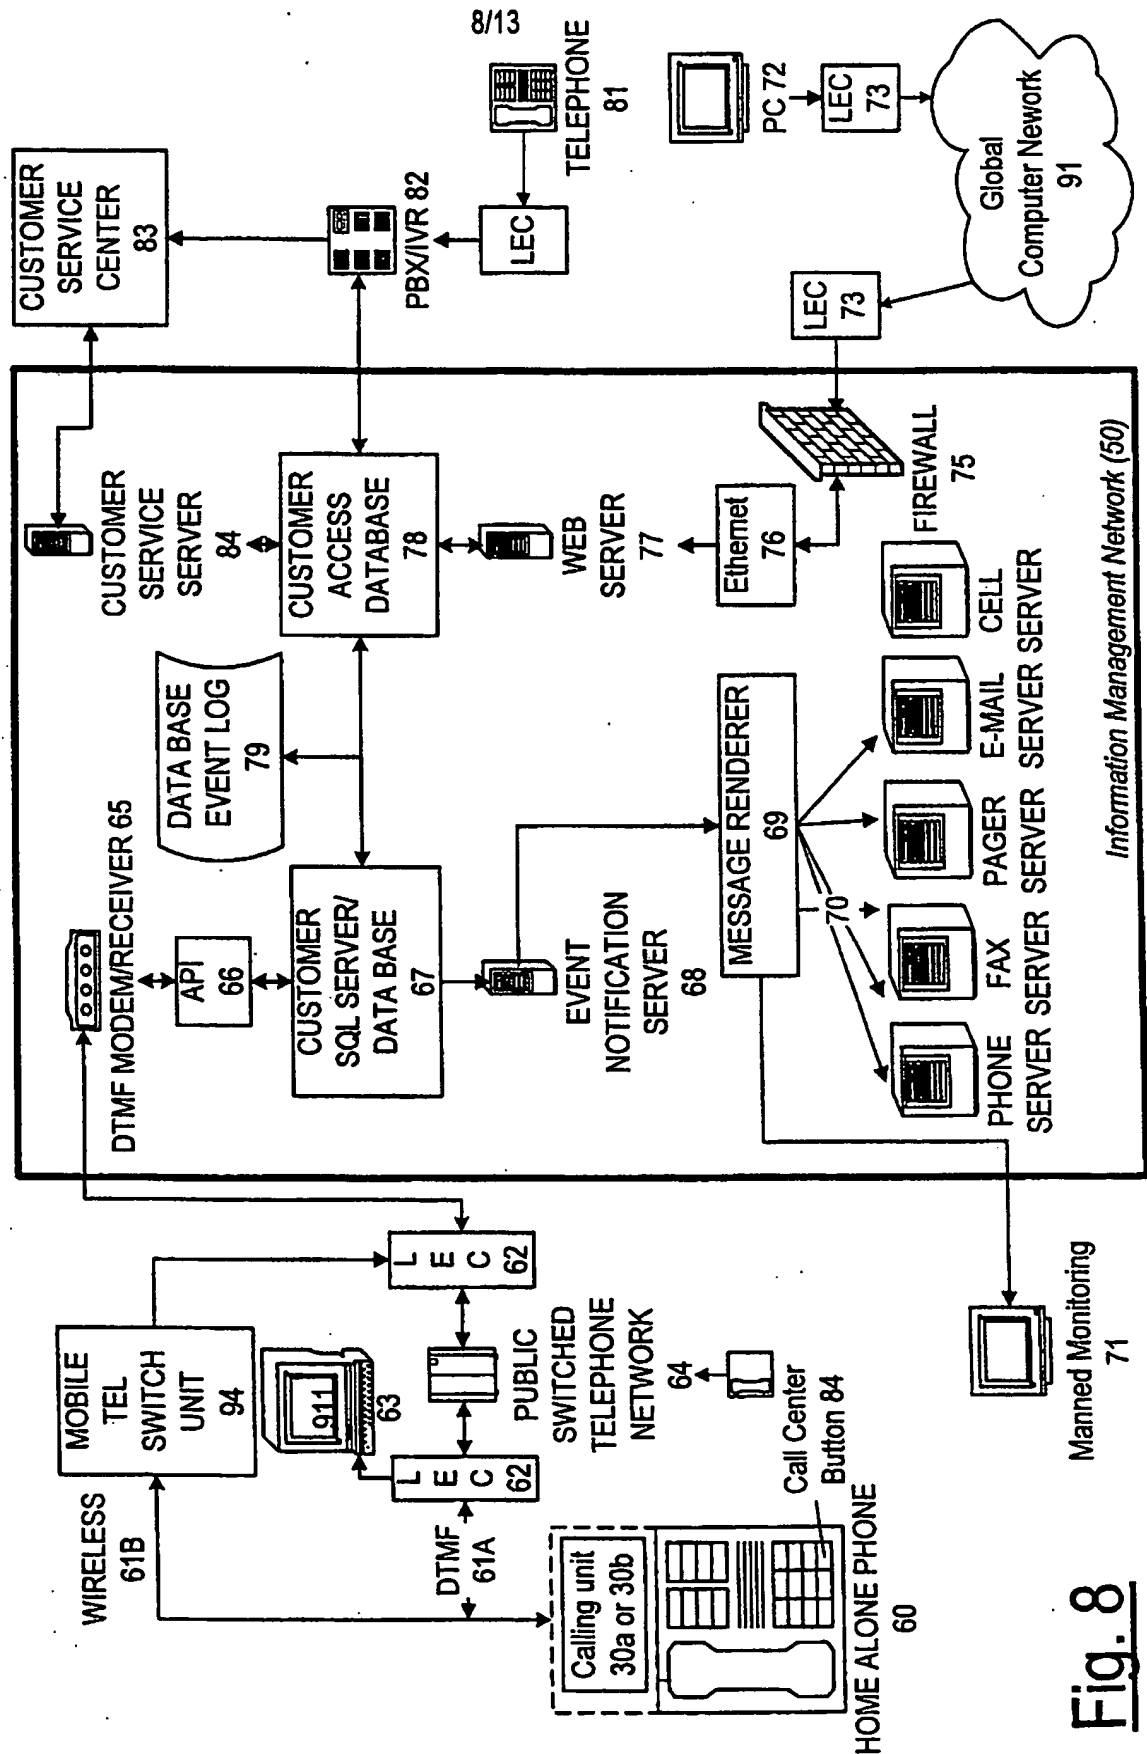


Fig. 8

9/13

FIG. 9A**CUSTOMER PROFILE INFORMATION**

Last Name(20 sp.) First Name(12 sp.) Middle Initial (1 sp.)
 Address
 Number (8 spaces)
 Street (25 spaces)
 City(15 spaces) State(2 spaces) Zip (5 spaces - 4 spaces)
 Home Phone Number (10 spaces) Work Number (10 spaces)

ALARM TEST**Contact Method:**

Cell Phone _____	Cell Phone Number(15 spaces)
Home Phone _____	Home Phone Number(15 spaces)
Email _____	Email Address(27 spaces)
Fax _____	Fax Number(15 spaces)
Work _____	Work Phone Number(15 spaces)
Pager/Beeper _____	Pager Number(15 spaces)

MANNED MONITORING

Yes _____ No _____

If you select Manned Monitoring there will be an additional charge of _____ each month for this service.

Manned Monitoring _____	Contact Number (15 spaces)
Police _____	Local Police Number (15 sp.)
Fire Dept _____	Local Fire Department (15 sp.)

PERSONAL MEDICAL INFO:

Doctor's Name (15 spaces)
 Doctor's Phone Number (15 spaces)
 Blood Pressure Checks(hours to be monitored)(15 sp.)
 Glucose Checks (time of day for check) (6spaces)
 Heart Monitor Yes _____ No _____
 Time for heart monitor reporting (6 spaces)

10/13

FIG. 9B**CONTACT LIST****Contact 1****Contact Time****All Day:** Yes ☐ No ☐**Contact time - Begin (2 sp.:2 sp.) to (2 sp.: 2 sp.)****Contact Method:**

Cell Phone <input type="checkbox"/>	Cell Phone Number (15 spaces)
Home Phone <input type="checkbox"/>	Home Phone Number (15 spaces)
Email <input type="checkbox"/>	Email Address (27 spaces)
Fax <input type="checkbox"/>	Fax Number (15 spaces)
Work <input type="checkbox"/>	Work Phone Number (15 spaces)
Pager/Beeper <input type="checkbox"/>	Pager Number (15 spaces)

Contact 2:**Contact Time****All Day** Yes ☐ No ☐**Contact time - Begin (2 sp.:2 sp.) to (2 sp.: 2 sp.)****Contact Method:**

Cell Phone <input type="checkbox"/>	Cell Phone Number (15 spaces)
Home Phone <input type="checkbox"/>	Home Phone Number (15 spaces)
Email <input type="checkbox"/>	Email Address (27 spaces)
Fax <input type="checkbox"/>	Fax Number (15 spaces)
Work <input type="checkbox"/>	Work Phone Number (15 spaces)
Pager/Beeper <input type="checkbox"/>	Pager Number (15 spaces)

Contact 3:**Contact Time****All Day** Yes ☐ No ☐**Contact time - Begin (2 sp.:2 sp.) to (2 sp.: 2 sp.)****Contact Method:**

Cell Phone <input type="checkbox"/>	Cell Phone Number (15 spaces)
Home Phone <input type="checkbox"/>	Home Phone Number (15 spaces)
Email <input type="checkbox"/>	Email Address (27 spaces)
Fax <input type="checkbox"/>	Fax Number (15 spaces)
Work <input type="checkbox"/>	Work Phone Number (15 spaces)
Pager/Beeper <input type="checkbox"/>	Pager Number (15 spaces)

11/13

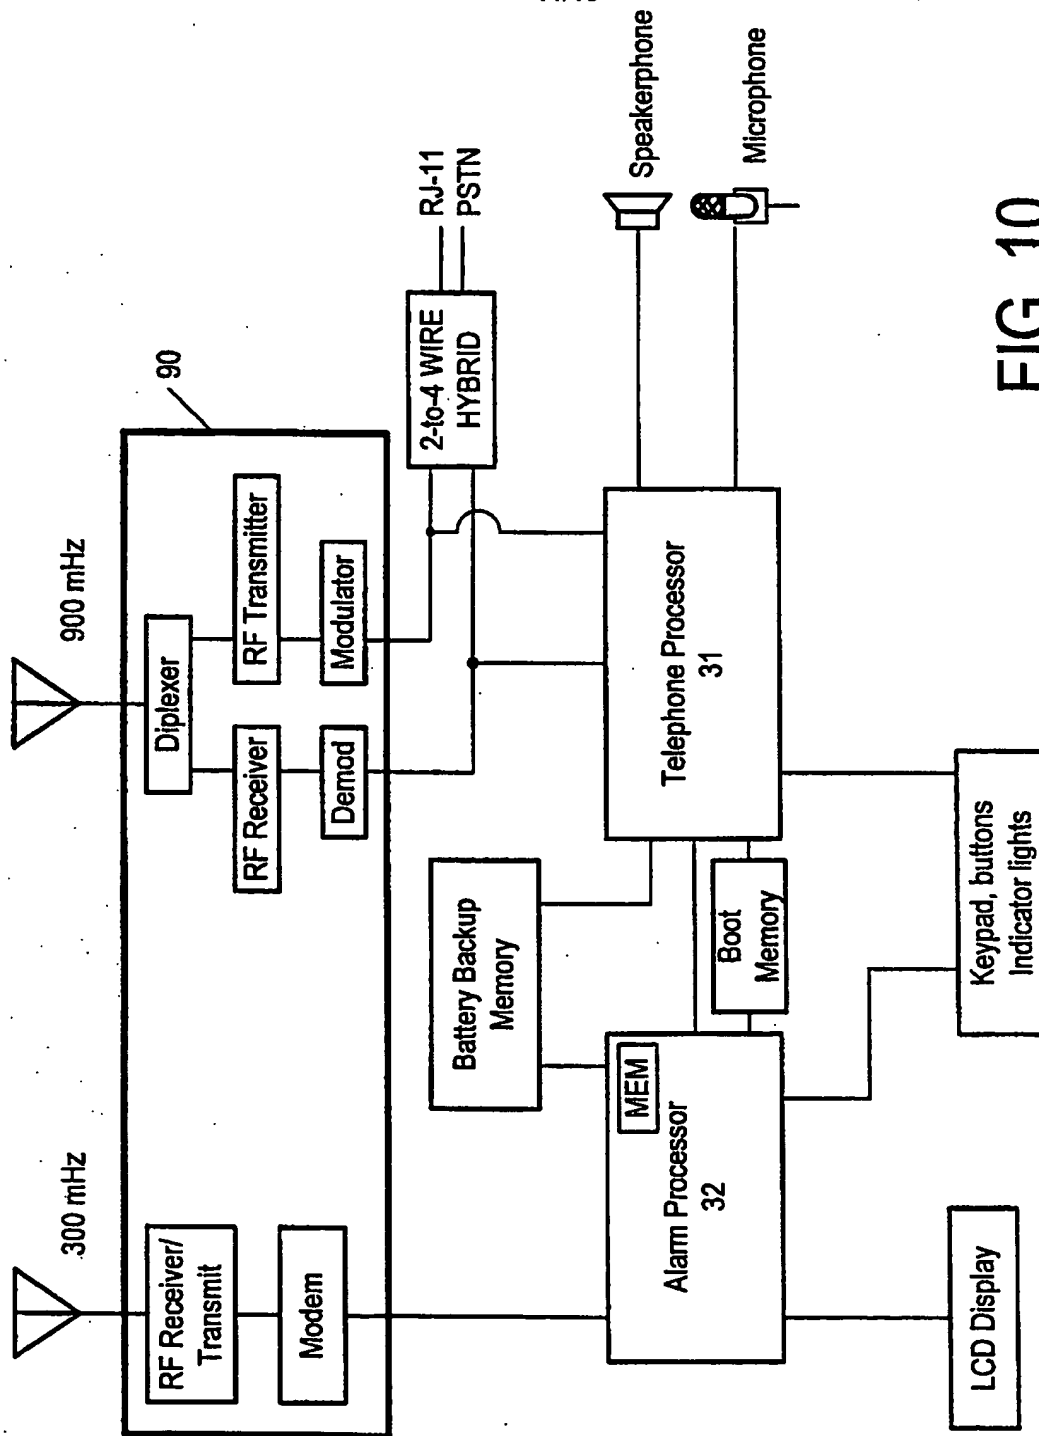


FIG. 10

12/13

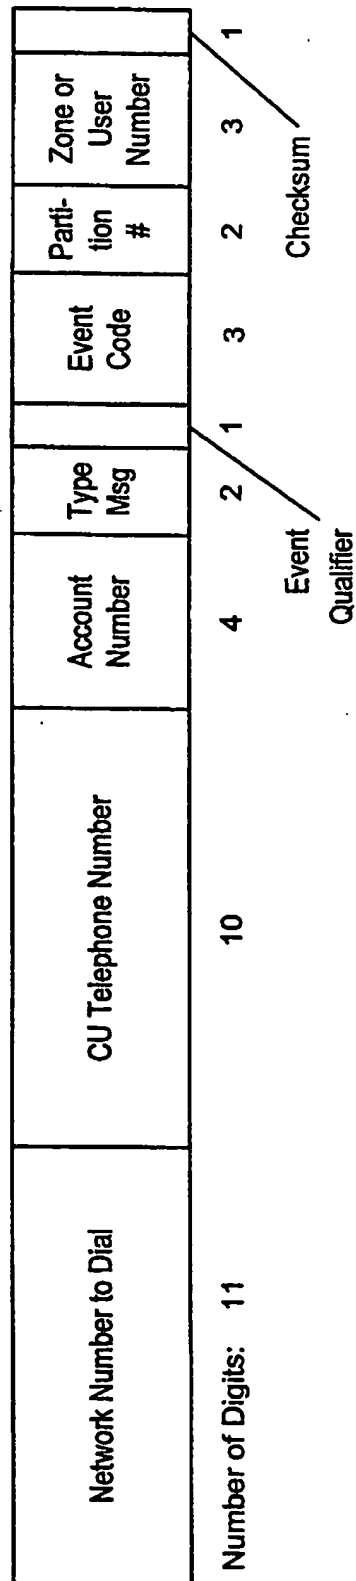


Fig. 11

Item	Number of DTMF Digits	Description
Network Number to Dial	11	The telephone number to be dialed for reporting alarms
Calling Unit Telephone Number	10	The telephone number of the telephone line to which the Calling Unit is connected.
Account Number	4	The user's account number
Type Message	2	Used to identify the message type and format
Event Qualifier	1	Describes whether the event is new, restored, closed, continuing, etc.
Event Code	3	Defines the type of alarm, or trouble, identifies test events, and system configuration changes. Medical event information would be included.
Partition Number	2	Defines the group or partition number.
Zone or User Number	3	Includes the zone number for events or user identification for open/close reports.
Checksum	1	Error detection code.

Fig. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/31718

A. CLASSIFICATION OF SUBJECT MATTER														
IPC(7) : H04Q 7/20 US CL : 455/557														
According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED														
Minimum documentation searched (classification system followed by classification symbols)														
U.S. : 455/556, 557, 73.1, 564, 567														
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched														
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)														
C. DOCUMENTS CONSIDERED TO BE RELEVANT														
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
X	US 5,604,791 A (LEE) 18 February 1997, fig.2, 4 and 13 col.17, line 31-col.18, line 28	1-12, 15 and 27												
A	US 5,845,207 A (AMIN et al) 01 December 1998, see whole document.	1-34												
A	US 5,978,688 A (MULLINS et al) 02 November 1999, see whole document.	1-34												
A	US 6,125,282 A (URABE) 26, September 2000, see whole document.	1-34												
A	US 6,131,040 A (KNUUTILA et al) 10 October 2000	1-34												
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.														
<table border="0"> <tr> <td>* Special categories of cited documents:</td> <td>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>*A* document defining the general state of the art which is not considered to be of particular relevance</td> <td>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>*B* earlier document published on or after the international filing date</td> <td>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>*A* document member of the same patent family</td> </tr> <tr> <td>*O* document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>*P* document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	*B* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family	*O* document referring to an oral disclosure, use, exhibition or other means		*P* document published prior to the international filing date but later than the priority date claimed	
* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention													
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone													
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art													
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family													
O document referring to an oral disclosure, use, exhibition or other means														
P document published prior to the international filing date but later than the priority date claimed														
Date of the actual completion of the international search		Date of mailing of the international search report												
14 FEBRUARY 2001		03 APR 2001												
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer CONGVAN TRAN Telephone No. (703) 305-5318												

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/31718

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-12, 15 and 27

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/31718

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

Group I, claims 1-15 and 27, drawn to interface attached devices (455/557).

Group II, claims 16-18, drawn to transmitter and receiver at same station (455/73).

Group III, claims 19-26, drawn to database application (707/104).

Group IV, claims 28-29, drawn to continuously variable indicating condition responsive (340/870.16)

Group V, claim 30, drawn to radio system including emergency or alarm communication (455/404).

Group VI, claims 31-33, drawn to radio system including private cordless extension system (455/462).

The inventions listed as Groups I-VI do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: Inventions I, II, III, IV, V, VI, VII and VIII are related as subcombinations disclosed as usable together in a single combination. The subcombinations are distinct from each other if they are shown to be separately usable. In the instant case, invention I has separate utility such as the interface between a terminal and a base unit, emergency alarm responsive.